

Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1660	RPM
Power consumption	P _e	380	W
Nominal current	I _{nom}	1.6/0.9	A
Maximum current	I _{max}	1.8/1.1	A
Cos φ		0	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	

Fan details

Impeller blades	3
Impeller type	4
Impeller system	K
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg	5000 CFM
-------------	----------




Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

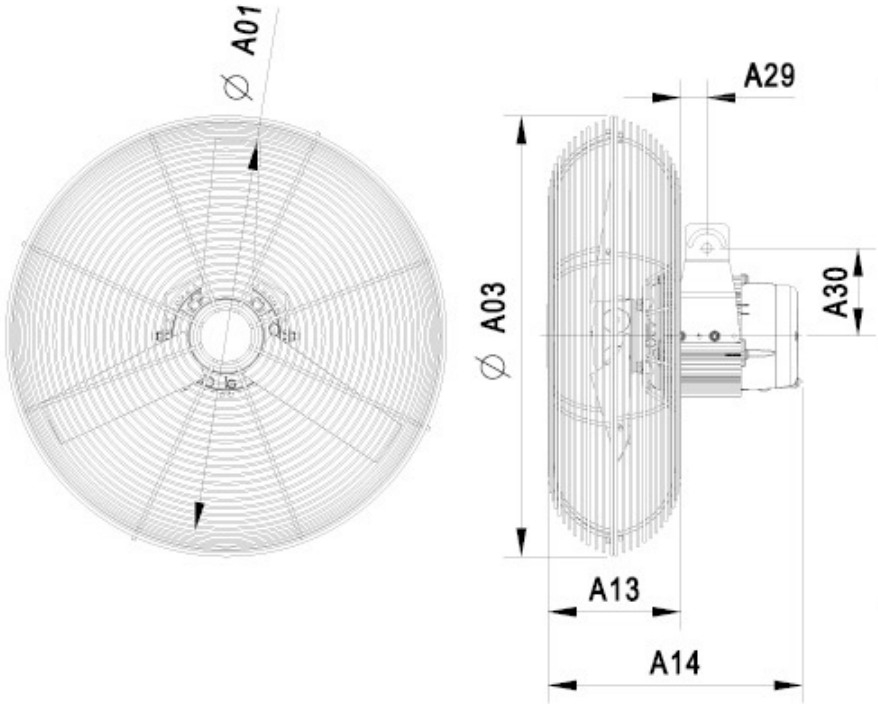

Dimensions			
		A01:	24.0 inch
		A03:	26.9 inch
		A13:	8.1 inch
		A14:	13.8 inch
		A29:	1.3 inch
		A30:	4.5 inch

