



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1165	RPM
Power consumption	P _e	1500	W
Nominal current	I _{nom}	5.2/3.1	A
Maximum current	I _{max}	6.0/3.5	A
Cos φ		0.62	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		42.0	kg
Packing dimensions		1200x1200x500	mm

Fan details


Impeller blades	4
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa 27600 m³/h
150 Pa 19700 m³/h

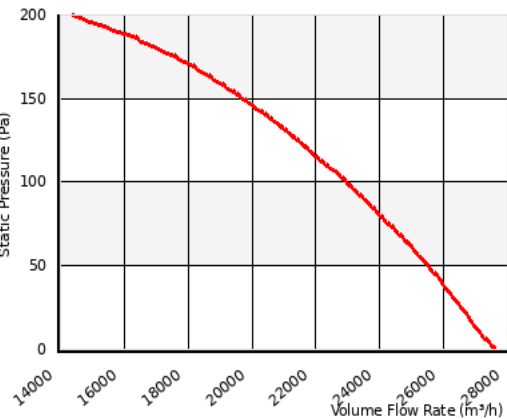

Please note: Picture may deviate from original product

Approval(s)

Motor approval
cULus

EAC



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

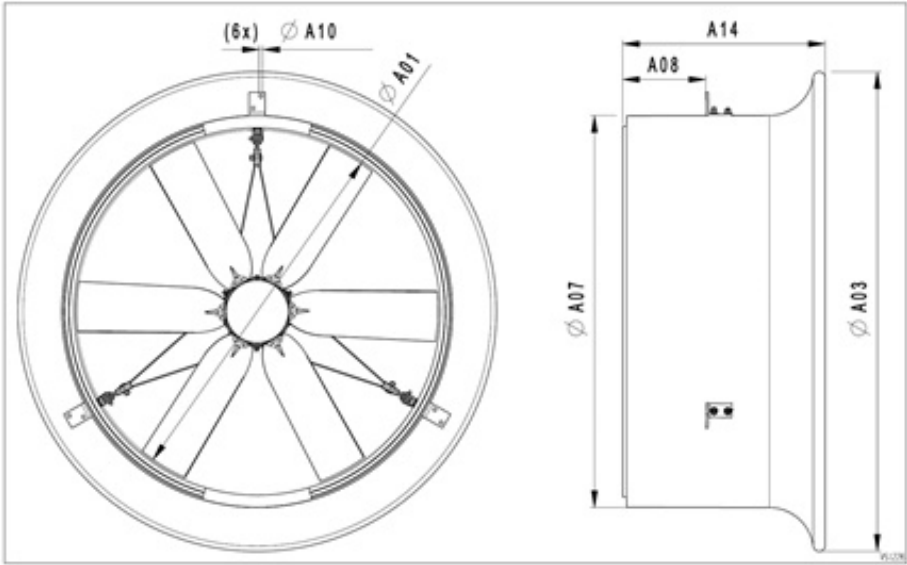


Fig. 1

A01:	900 mm
A03:	1116 mm
A07:	931 mm
A08:	228 mm
A10:	9 mm
A14:	412 mm

