



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	945	RPM
Power consumption	P _e	690	W
Nominal current	I _{nom}	2.5/1.4	A
Maximum current	I _{max}	2.8/1.6	A
Cos φ		0.7	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	71	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	60	dB(A)
Weight		53.0	Lbs.
Packing dimensions		34.3x34.3x15.6	inch

Fan details


Impeller blades	5
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg 9000 CFM
0.20 in. wg 7830 CFM

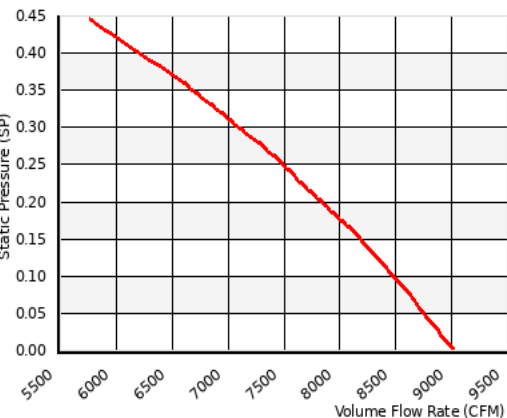

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



