

Technical data

Voltage	U	400-480	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	590	RPM
Power consumption	P _e	1550	W
Nominal current	I _{nom}	2.5	A
Maximum current	I _{max}	2.7	A
Cos φ		0.9	
Capacitor		-	μF/V
Service factor current		2.7	A
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CLF	
IP Class Fan		IP55	
Weight		79.9	kg
Packing dimensions		300x1000x1000	mm



Fan details

Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No
Intelligent Fan Drive	No

Characteristics

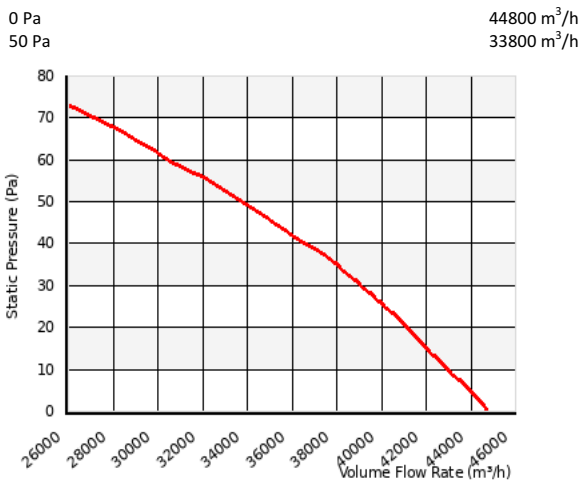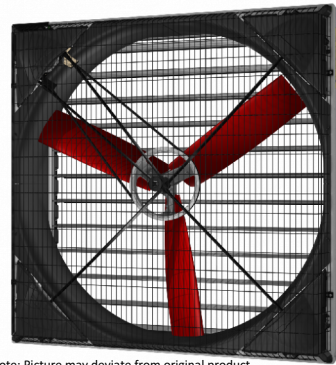


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram

BR02 - Connection diagram MFD three phase 10-V 0-10V - -

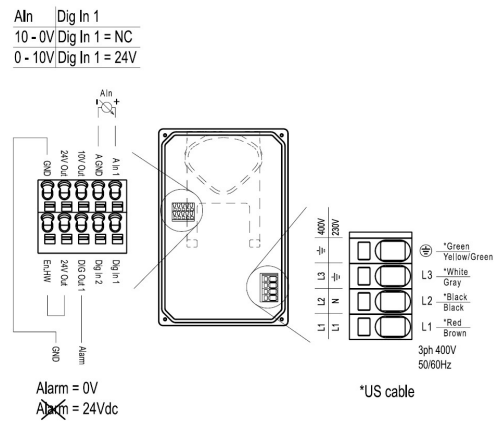

Dimensions

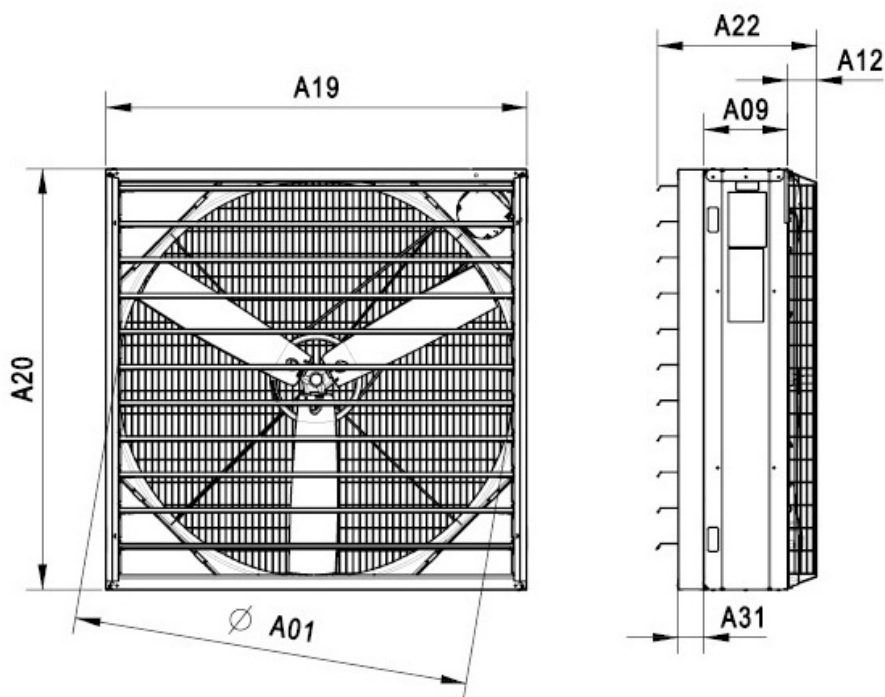

A01:	1284 mm
A09:	275 mm
A12:	96 mm
A19:	1382 mm
A20:	1382 mm
A22:	523 mm
A31:	85 mm