



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	835	RPM
Power consumption	P _e	620	W
Nominal current	I _{nom}	3.1/1.8	A
Maximum current	I _{max}	3.4/2.0	A
Cos φ		0.5	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	69	db(A)
Sound pressure level (7 m)	L _{p (calc.)}	58	db(A)
Weight		29.9	kg
Packing dimensions		187.8x1000x1000	mm

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa	22050 m ³ /h
------	-------------------------




Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

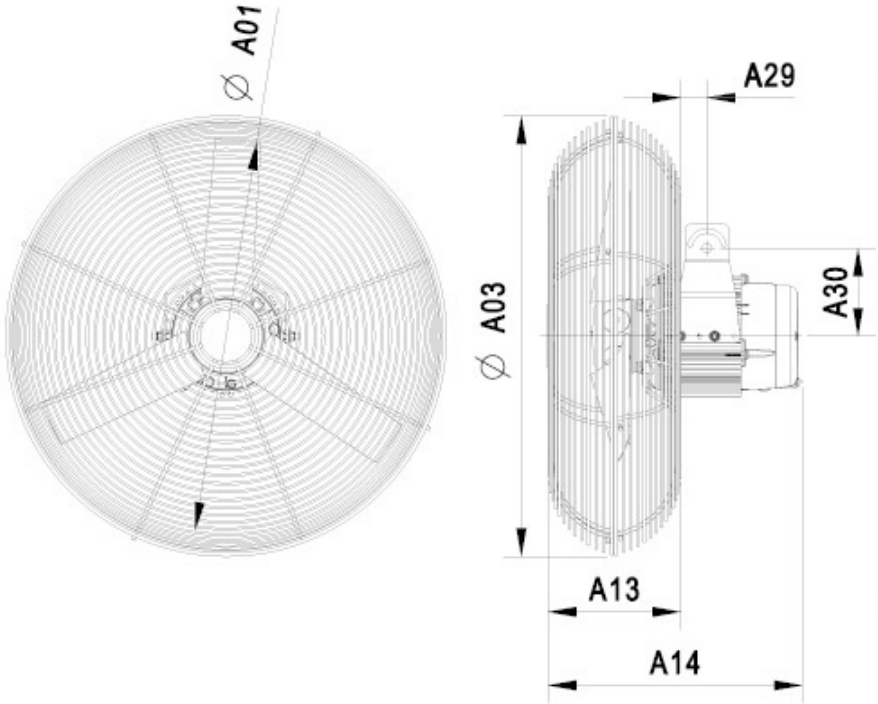

Dimensions			
		A01:	905 mm
		A03:	983 mm
		A13:	254 mm
		A14:	425 mm
		A29:	29 mm
		A30:	115 mm

