

Technical data

Voltage	U	120	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1070	RPM
Power consumption	P _e	710	W
Nominal current	I _{nom}	5.9	A
Maximum current	I _{max}	6.7	A
Cos φ		0.96	
Capacitor		56/250	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		18.7	kg

Fan details



Impeller blades	5
Impeller type	S
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa 12500 m³/h
50 Pa 10900 m³/h

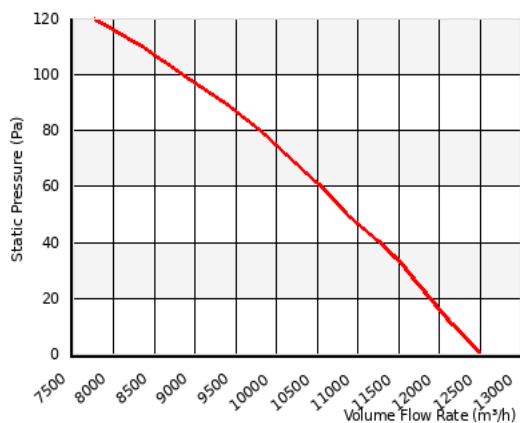


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

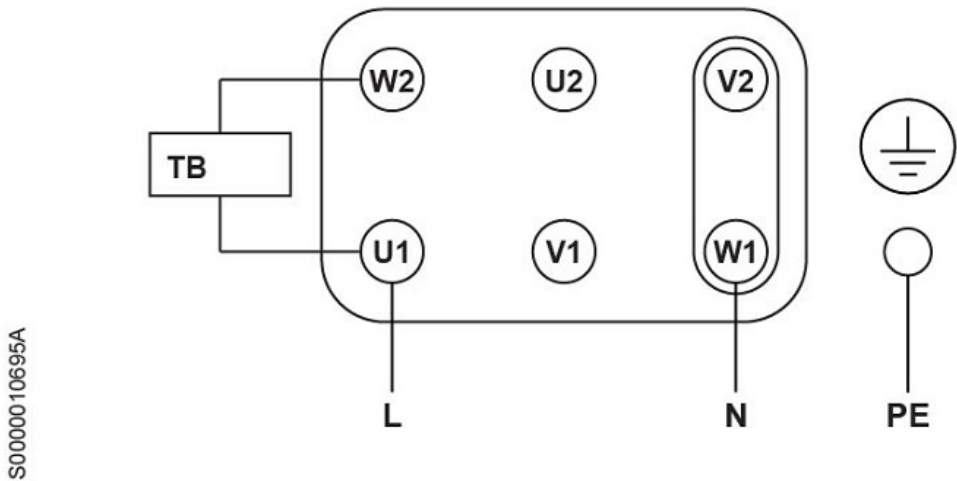

Dimensions

