

Technical data

Voltage	U	240	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1695	RPM
Power consumption	P _e	290	W
Nominal current	I _{nom}	1.4	A
Maximum current	I _{max}	1.7	A
Cos φ		0.92	
Capacitor		06/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		97.6	Lbs.

Fan details



Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg 4180 CFM
0.20 in. wg 3560 CFM

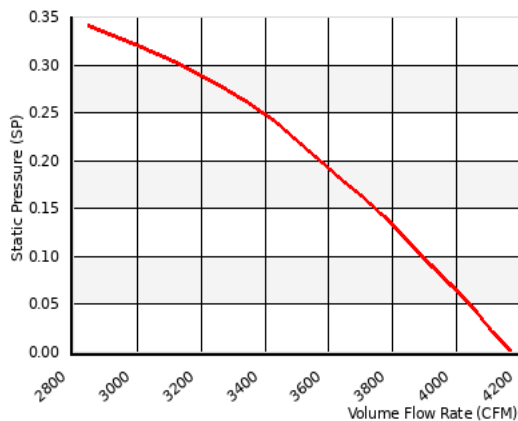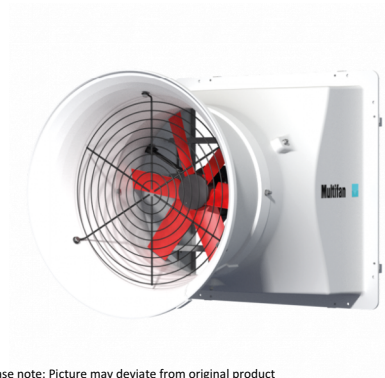


Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

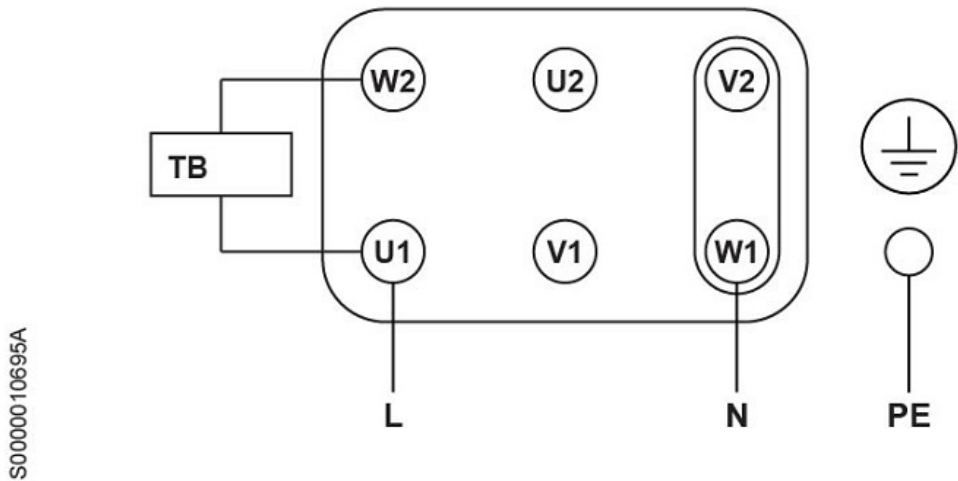

Dimensions

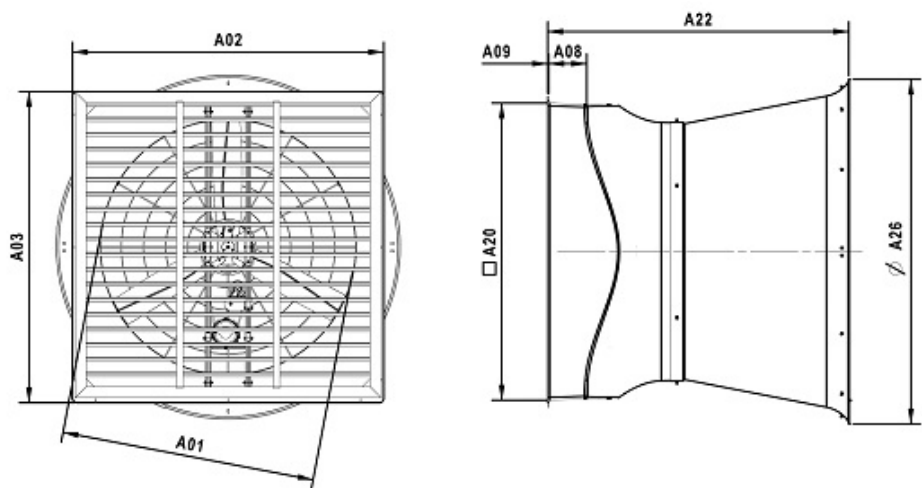

A01:	17.7 inch
A02:	27.1 inch
A03:	27.1 inch
A08:	8.1 inch
A09:	0.3 inch
A20:	23.6 inch
A22:	30.9 inch
A26:	25.4 inch