

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	925	RPM
Power consumption	P _e	670	W
Nominal current	I _{nom}	2.3/1.4	A
Maximum current	I _{max}	2.5/1.4	A
Cos φ		0.74	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		37.8	kg
Packing dimensions		1100x455x1240	mm

Fan details



Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0 Pa	17200 m ³ /h
50 Pa	13600 m ³ /h

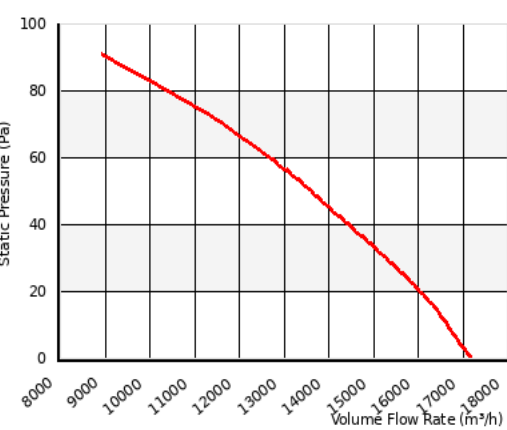

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

