



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1155	RPM
Power consumption	P _e	650	W
Nominal current	I _{nom}	2.2/1.3	A
Maximum current	I _{max}	2.6/1.5	A
Cos φ		0.66	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		45.5	Lbs.
Packing dimensions		28.3x28.3x15.7	inch

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	7710 CFM
0.40 in. wg	5800 CFM

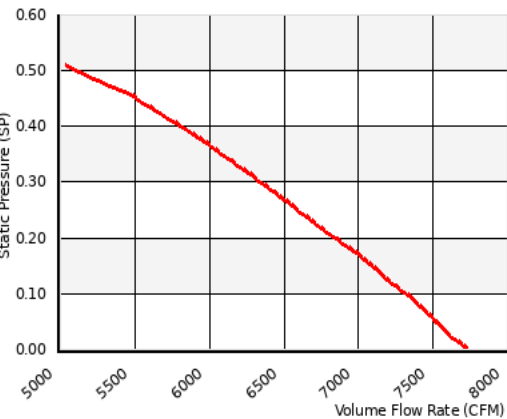

Please note: Picture may deviate from original product

Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

