



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	935	RPM
Power consumption	P _e	430	W
Nominal current	I _{nom}	2	A
Maximum current	I _{max}	2.9	A
Cos φ		0.93	
Capacitor		12/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	64	db(A)
Sound pressure level (7 m)	L _{p (calc.)}	53	db(A)
Weight		28.8	kg
Packing dimensions		825x825x395	mm

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa	14650 m ³ /h
------	-------------------------




Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A

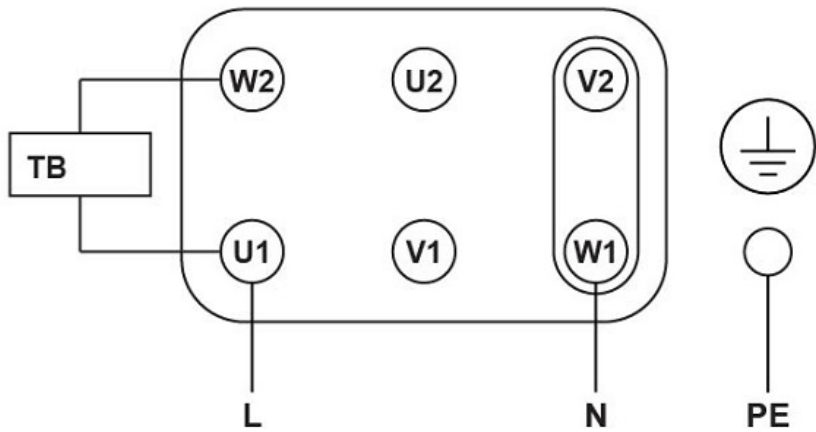

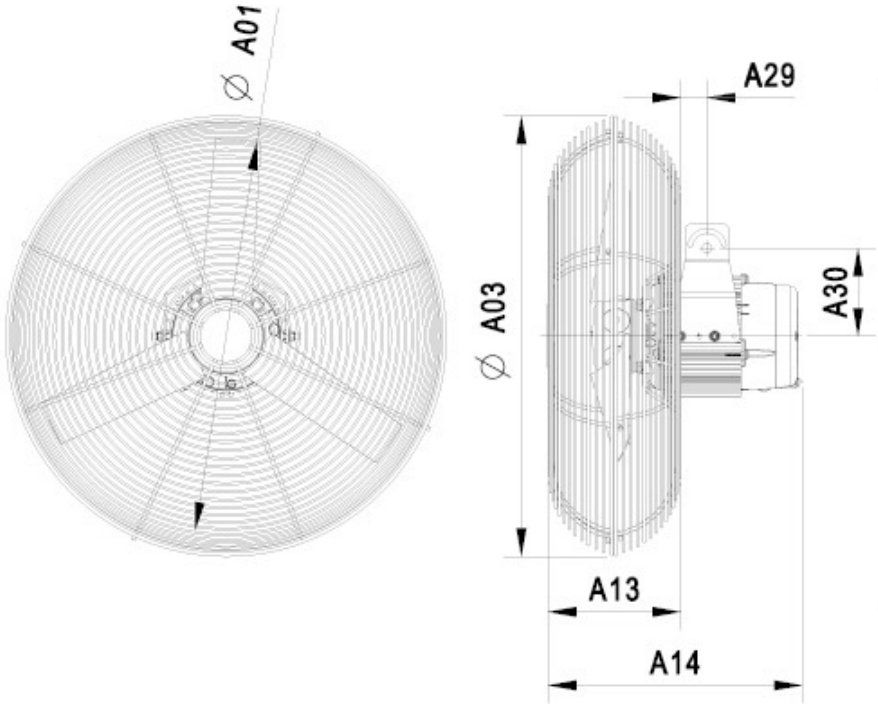Dimensions			
	A01:	709 mm	
	A03:	830 mm	
	A13:	230 mm	
	A14:	413 mm	
	A29:	29 mm	
	A30:	115 mm	
		VOSTERMANS VENTILATION	
Vostermans Ventilation B.V. Venlo - The Netherlands +31 (0)77 389 32 32 ventilation@vostermans.com		Vostermans Ventilation Inc. Bloomington, IL - U.S.A. +1 309 827 9798 ventilation@vostermansusa.com	
		Vostermans Ventilation Ltd. Co. Shanghai - China +86 21 5290 2889/2899 ventilation@vostermanschina.com	
		Vostermans Ventilation Sdn. Bhd. Tmn Klang Jaya - Malaysia +60 (0)33324 3638 ventilation@vostermansasia.com	