

Technical data

Voltage	U	240/420	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	580	RPM
Power consumption	P _e	1550	W
Nominal current	I _{nom}	4.6/2.7	A
Maximum current	I _{max}	4.9/2.8	A
Cos φ		0.8	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		160.6	Lbs.
Packing dimensions		7.5x39.4x39.4	inch

Fan details



Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg	26500 CFM
0.20 in. wg	19650 CFM

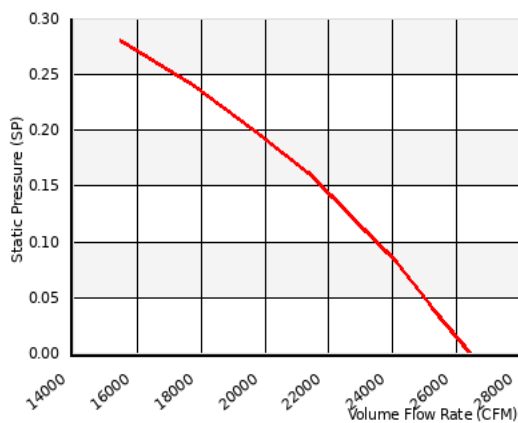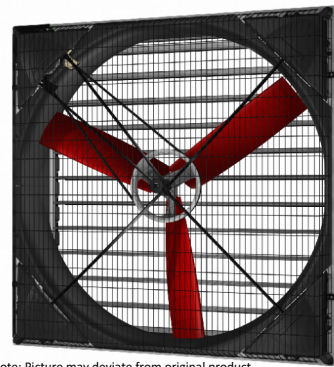

Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

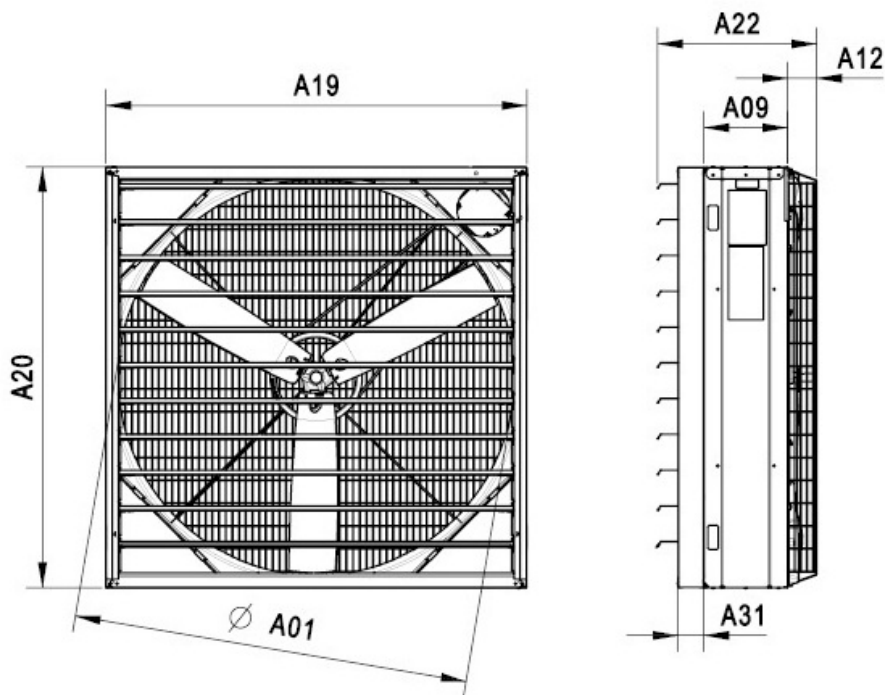

A01:	50.6 inch
A09:	10.8 inch
A12:	3.8 inch
A19:	54.4 inch
A20:	54.4 inch
A22:	20.6 inch
A31:	3.3 inch