



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	555	RPM
Power consumption	P _e	1500	W
Nominal current	I _{nom}	4.7/2.7	A
Maximum current	I _{max}	5.7/3.3	A
Cos φ		0.81	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	75	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	64	dB(A)
Weight		278.0	Lbs.
Packing dimensions		102.0x39.4x39.4	inch

Fan details


Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg	34800 CFM
0.20 in. wg	28800 CFM

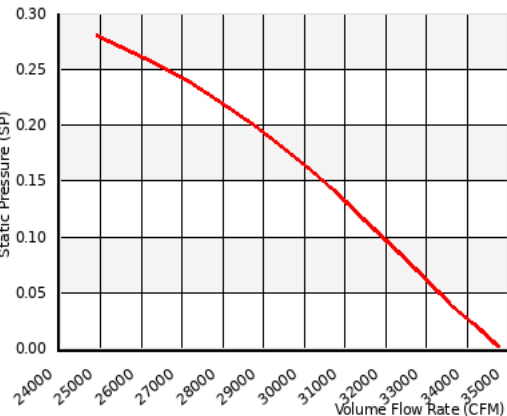


Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CW

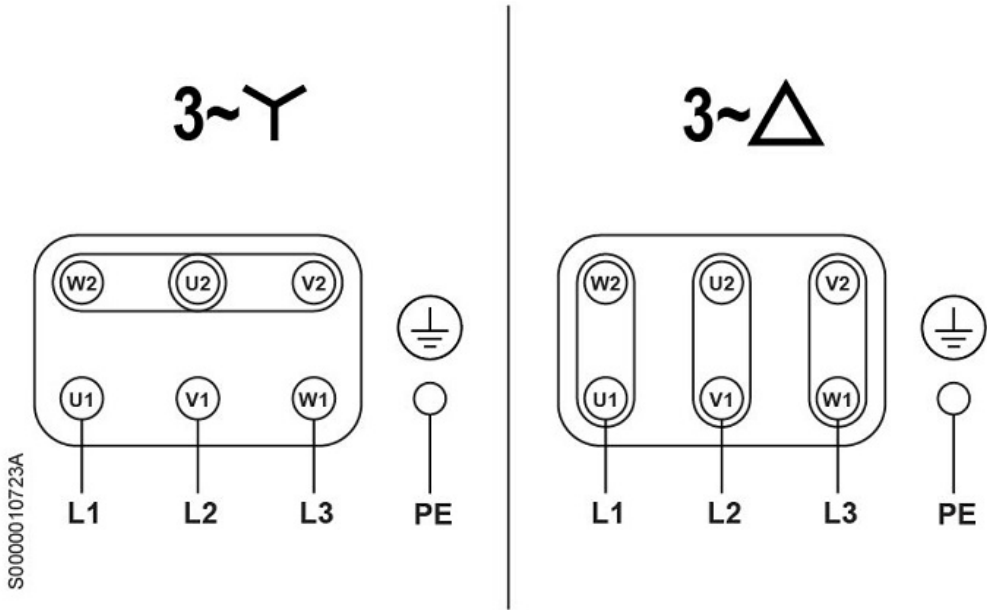

Dimensions

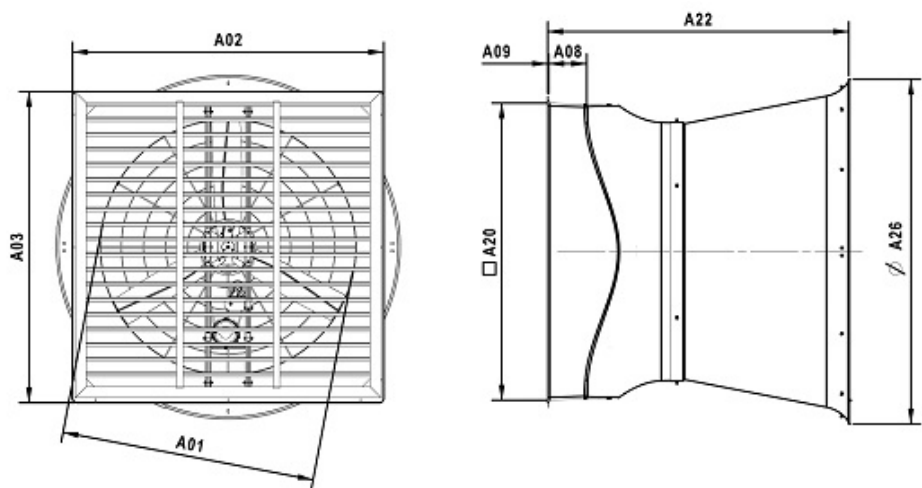

A01:	53.9 inch
A02:	67.3 inch
A03:	67.3 inch
A04:	7.0 inch
A05:	0.4 inch
A06:	63.8 inch
A07:	65.0 inch
A08:	73.8 inch