



### Technical data

|                               |                          |                |       |
|-------------------------------|--------------------------|----------------|-------|
| Voltage                       | U                        | 115            | V     |
| Phase                         |                          | 1              | ~     |
| Frequency                     | f                        | 60             | Hz    |
| Speed                         | n                        | 1670           | RPM   |
| Power consumption             | P <sub>e</sub>           | 380            | W     |
| Nominal current               | I <sub>nom</sub>         | 3.4            | A     |
| Maximum current               | I <sub>max</sub>         | 5.7            | A     |
| Cos φ                         |                          | 0.99           |       |
| Capacitor                     |                          | 30/250         | μF/V  |
| Ambient temperature           | T <sub>amb min/max</sub> | -13...104      | °F    |
| Insulation Class              |                          | CL.F           |       |
| IP Class                      |                          | IP55           |       |
| Sound pressure level (6.6 ft) | L <sub>p</sub> (meas.)   | 70             | dB(A) |
| Sound pressure level (23 ft)  | L <sub>p</sub> (calc.)   | 59             | dB(A) |
| Weight                        |                          | 31.4           | Lbs.  |
| Packing dimensions            |                          | 26.4x26.4x12.4 | inch  |

### Fan details


|                   |    |
|-------------------|----|
| Impeller blades   | 4  |
| Impeller type     | 3  |
| Impeller system   | C  |
| Impeller material | PP |

### Control options

|                  |     |
|------------------|-----|
| Triac controller | Yes |
| Transformer      | Yes |
| Frequency drive  | No  |

### Characteristics

|             |          |
|-------------|----------|
| 0.00 in. wg | 4830 CFM |
| 0.20 in. wg | 4210 CFM |

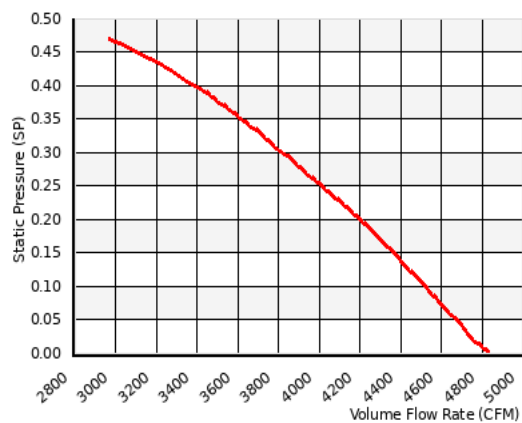

Please note: Picture may deviate from original product

### Approval(s)

Motor approval  
cULus







Wiring diagram

C1 - 1 Phase - Standard - CCW

S0000010695A

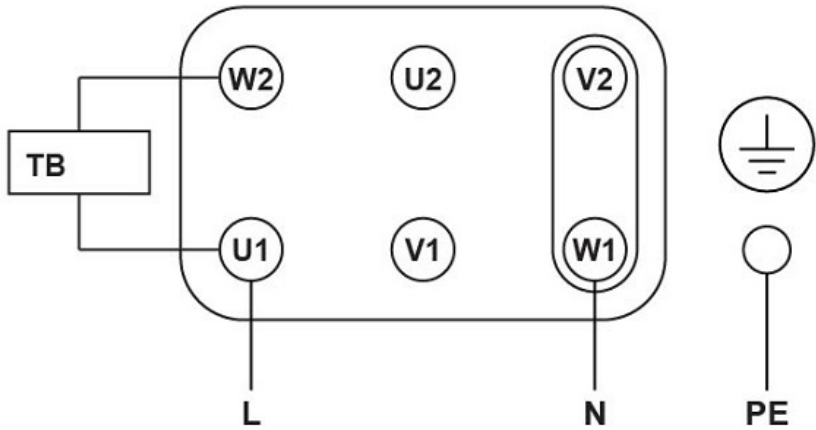

Dimensions

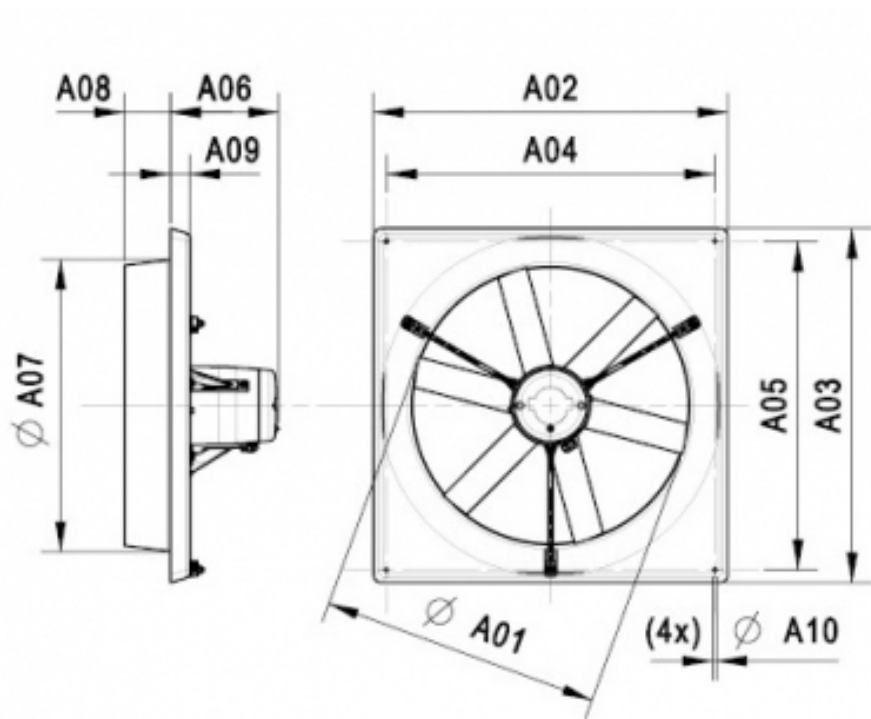

|      |           |
|------|-----------|
| A01: | 20.2 inch |
| A02: | 25.5 inch |
| A03: | 25.5 inch |
| A04: | 23.6 inch |
| A05: | 23.6 inch |
| A06: | 7.6 inch  |
| A07: | 21.3 inch |
| A08: | 3.3 inch  |
| A09: | 1.4 inch  |
| A10: | 0.3 inch  |