



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	860	RPM
Power consumption	P _e	770	W
Nominal current	I _{nom}	3.2/1.8	A
Maximum current	I _{max}	3.6/2.1	A
Cos φ		0.53	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Packing dimensions		29.7x29.7x16.1	inch

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg 12700 CFM
0.20 in. wg 10500 CFM

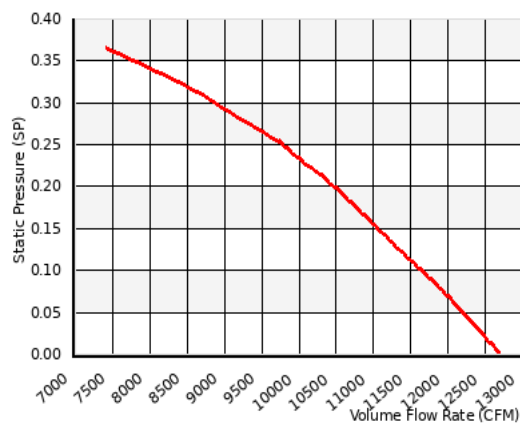

Please note: Picture may deviate from original product

Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

