Article number: V4S40ABE10100

Panel fans

Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1430	RPM
Power consumption	P_e	220	W
Nominal current	I	1	A
Maximum current	I	1.8	A
Capacitor		04/400	µF
Ambient temperature	$T_{amb\ min/max}$	-13...104	°F
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level	L_p	66	dB(A)
Sound pressure level distance		6.6	ft
Weight		31.1	Lbs.
Packing dimensions		22.1x22.1x12.4	inch

Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

Characteristics

0.00 in. wg	2970 CFM
0.20 in. wg	2530 CFM

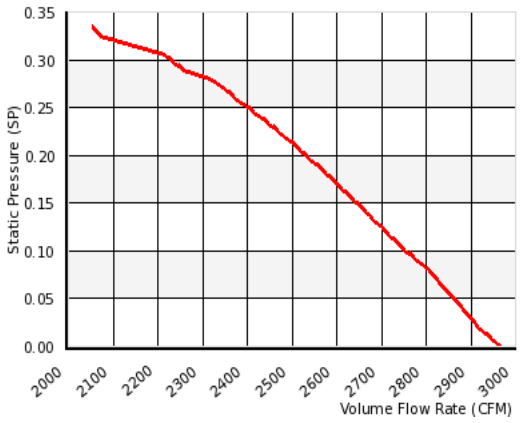

Please note: Picture may deviate from original product

Approval(s)

ErP 2020

Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

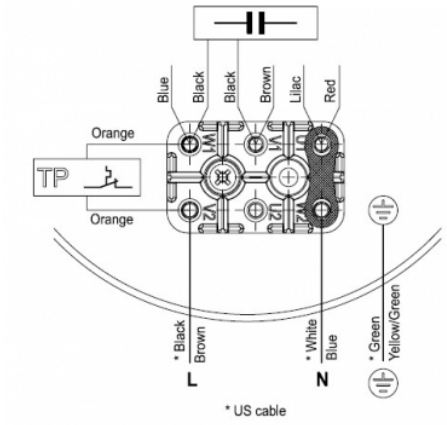

Dimensions

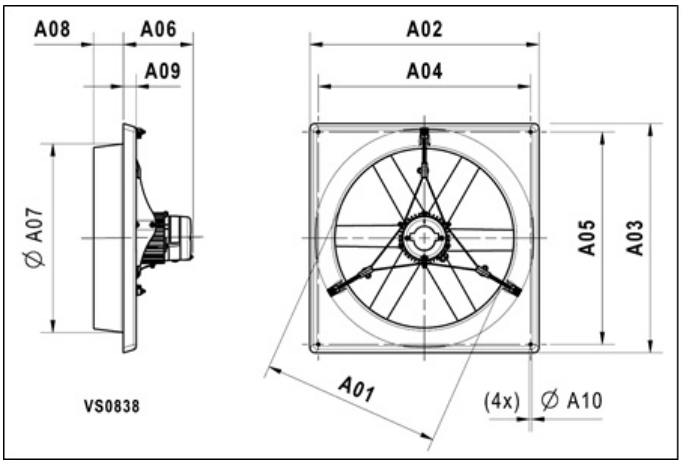

A01:	16.3 inch
A02:	21.4 inch
A03:	21.4 inch
A04:	19.5 inch
A05:	19.5 inch
A06:	7.6 inch
A07:	17.3 inch
A08:	3.3 inch
A09:	1.4 inch
A10:	0.3 inch

VOSTERMANS VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Version 2.5 28Mar2023