

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	3360	RPM
Power consumption	P _e	370	W
Nominal current	I _{nom}	1.7	A
Maximum current	I _{max}	2.2	A
Cos φ		1	
Capacitor		04/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		10.5	kg
Packing dimensions		460x460x315	mm


Fan details

Impeller blades	6
Impeller type	2
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	No
Frequency drive	No


Characteristics

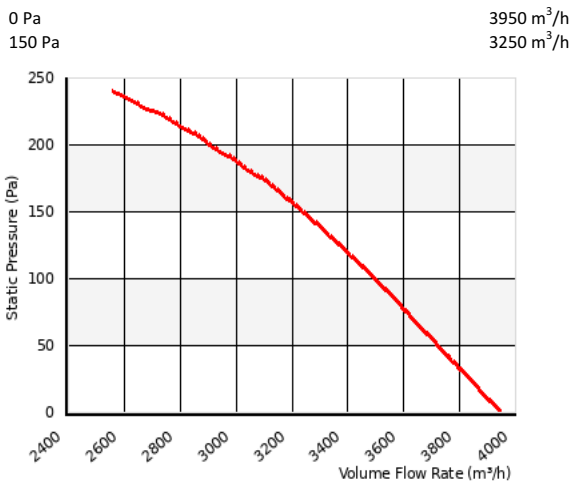

Please note: Picture may deviate from original product

Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A

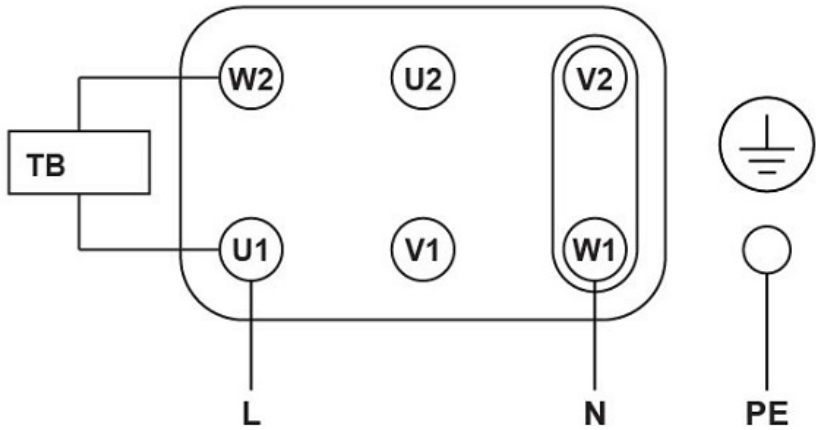

VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Dimensions	
	A01: 312 mm
	A02: 442.5 mm
	A03: 442.5 mm
	A04: 395 mm
	A05: 395 mm
	A06: 192 mm
	A07: 340 mm
	A08: 84 mm
	A09: 36 mm
	A10: 7.5 mm

