



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	535	RPM
Power consumption	P _e	1550	W
Nominal current	I _{nom}	5.4/3.2	A
Maximum current	I _{max}	6.5/3.8	A
Cos φ		0.72	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	76	db(A)
Sound pressure level (23 ft)	L _p (calc.)	65	db(A)
Weight		184.6	Lbs.
Packing dimensions		58.3x18.7x58.3	inch

Fan details


Impeller blades	6
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg 27200 CFM
0.20 in. wg 23200 CFM

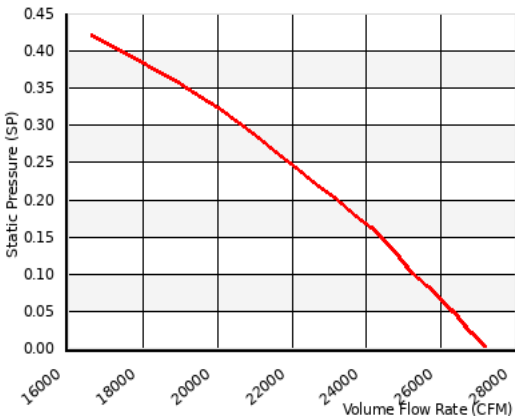

Please note: Picture may deviate from original product

Approval(s)



No.15400



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com


Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com


Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Wiring diagram

C11 - 3 Phase - Y connection - CCW

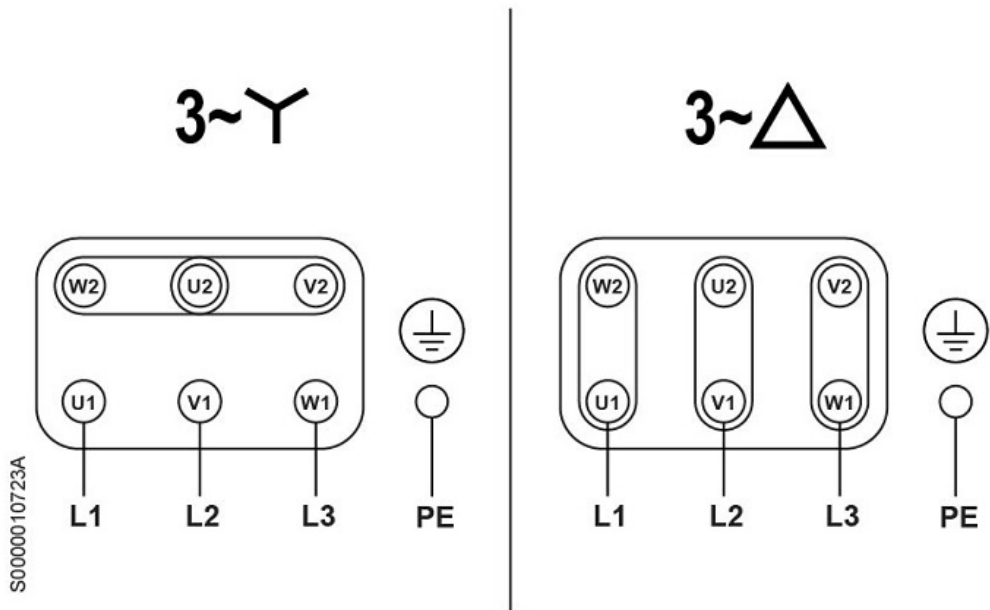

Dimensions

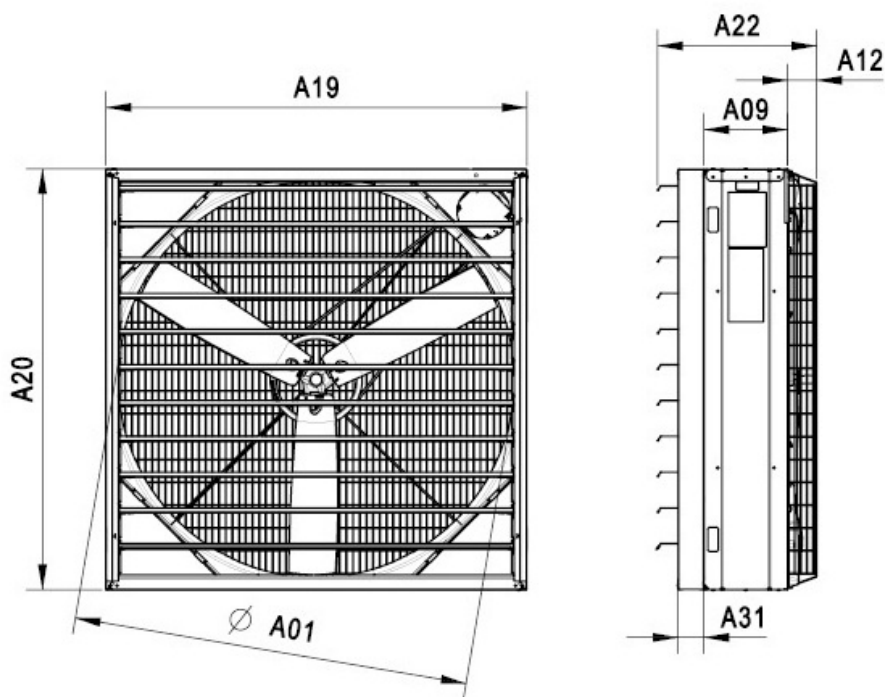

A01:	54.1 inch
A09:	11.6 inch
A12:	3.8 inch
A19:	58.3 inch
A20:	58.3 inch
A22:	21.6 inch
A31:	3.3 inch