

Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1165	RPM
Power consumption	P _e	1500	W
Nominal current	I _{nom}	5.2/3.1	A
Maximum current	I _{max}	6.0/3.5	A
Cos φ		0.62	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		92.6	Lbs.
Packing dimensions		47.2x47.2x19.7	inch

Fan details


Impeller blades	4
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	16250 CFM
0.60 in. wg	11600 CFM

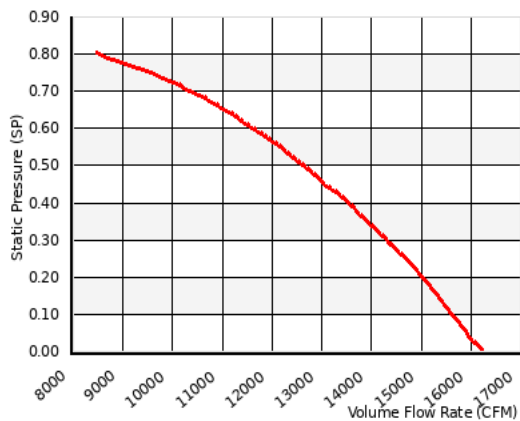

Please note: Picture may deviate from original product


Approval(s)

Motor approval
cULus

EAC



Wiring diagram
C11 - 3 Phase - Y connection - CCW

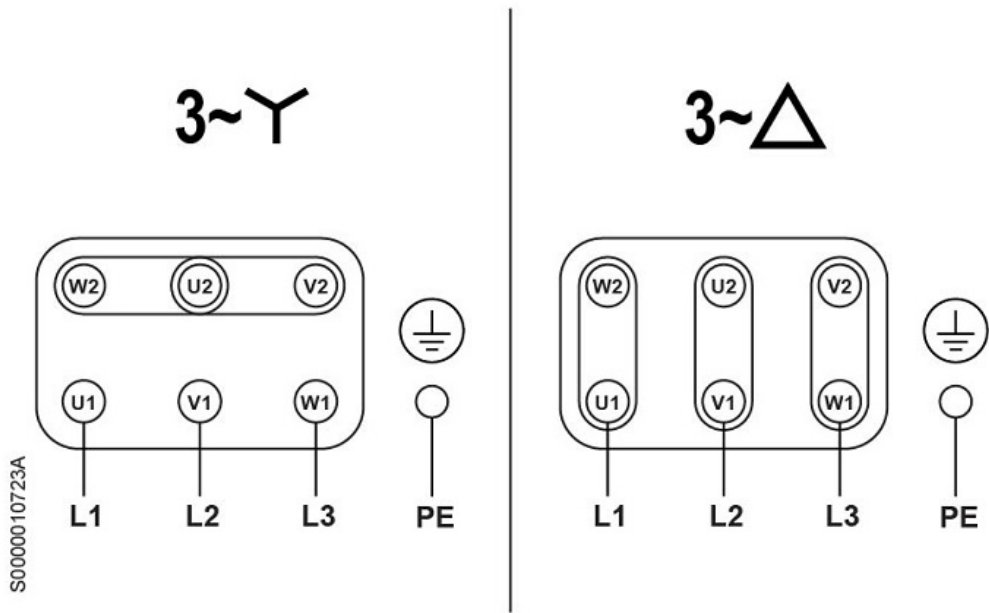

Dimensions

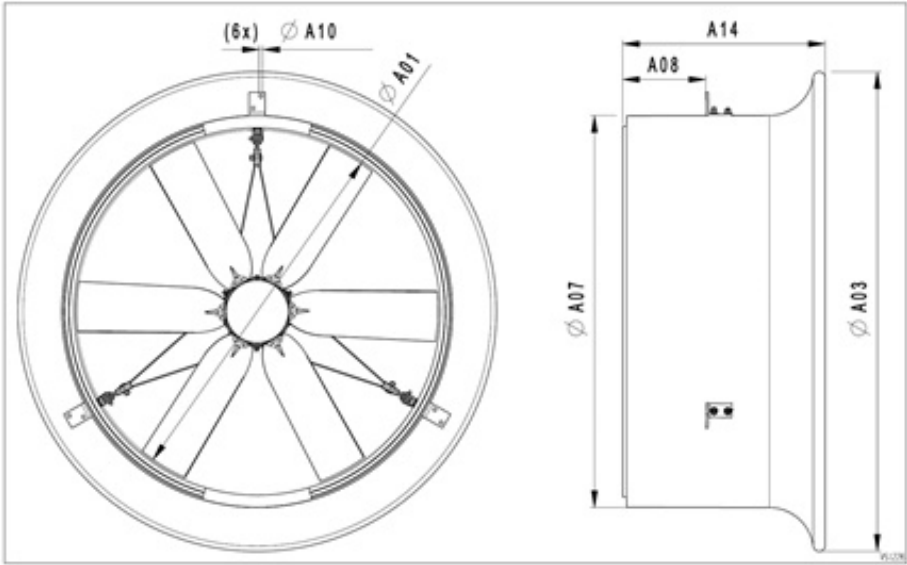


Fig. 1

A01:	35.4 inch
A03:	43.9 inch
A07:	36.7 inch
A08:	9.0 inch
A10:	0.4 inch
A14:	16.2 inch