



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1155	RPM
Power consumption	P _e	650	W
Nominal current	I _{nom}	2.2/1.3	A
Maximum current	I _{max}	2.6/1.5	A
Cos φ		0.66	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		24.0	kg
Packing dimensions		800x790x395	mm


Fan details

Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

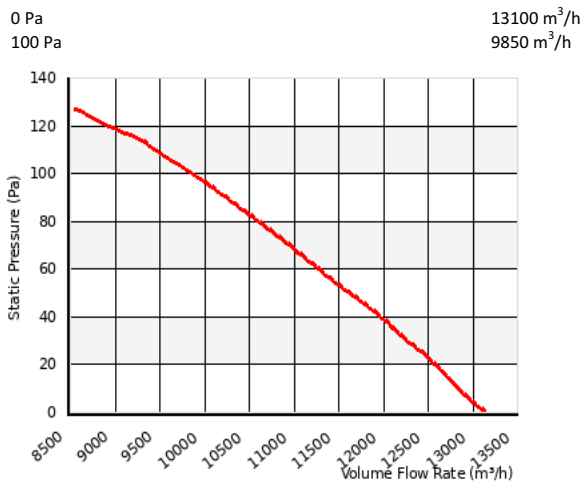

Please note: Picture may deviate from original product

Approval(s)


Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

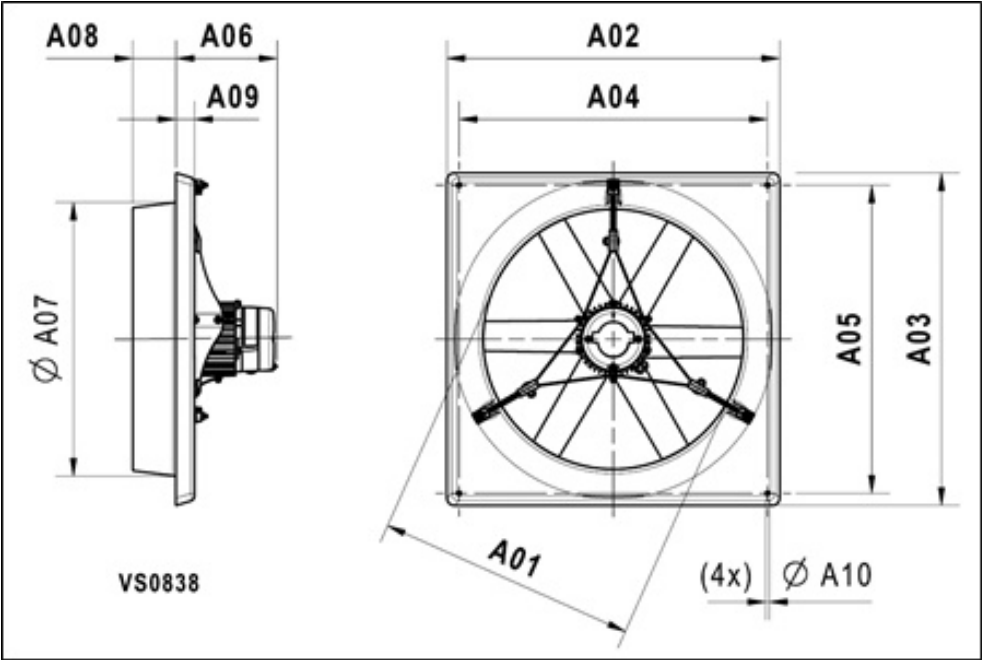

A01:	646 mm
A02:	775 mm
A03:	775 mm
A04:	715 mm
A05:	715 mm
A06:	247 mm
A07:	670 mm
A08:	105 mm
A09:	40 mm
A10:	10 mm

