



Technical data

Voltage	U	230	V
Phase	1		~
Frequency	f	60	Hz
Speed	n	1650	RPM
Power consumption	P _e	330	W
Nominal current	I _{nom}	1.5	A
Maximum current	I _{max}	2.0	A
Cos φ		0.99	
Capacitor		08/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	67	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	56	dB(A)
Weight		26.0	Lbs.
Packing dimensions		20.1x20.1x12.4	inch

Fan details



Impeller blades	4
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	3910 CFM
0.20 in. wg	3350 CFM

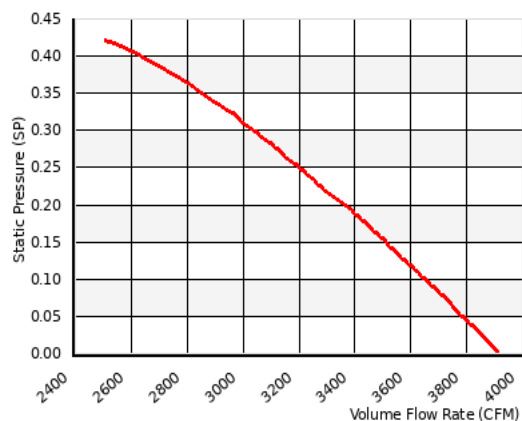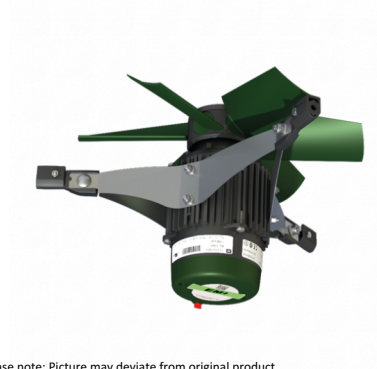

Please note: Picture may deviate from original product

Approval(s)

Motor approval
CE **UL**

Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A

