

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	595	RPM
Power consumption	P _e	1700	W
Nominal current	I _{nom}	7.9	A
Maximum current	I _{max}	9.2	A
Cos φ		0.93	
Capacitor		32/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		269.8	Lbs.
Packing dimensions		24.1x39.4x39.4	inch

Fan details



Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics


0.00 in. wg 31050 CFM
0.20 in. wg 25200 CFM

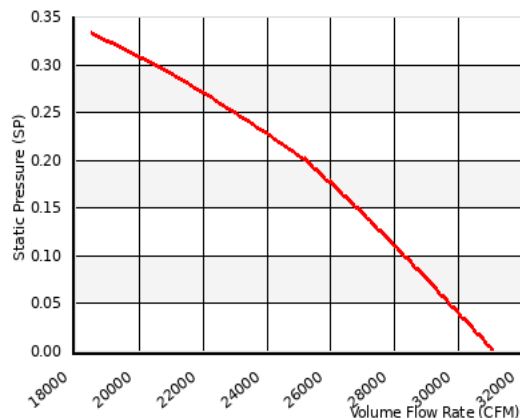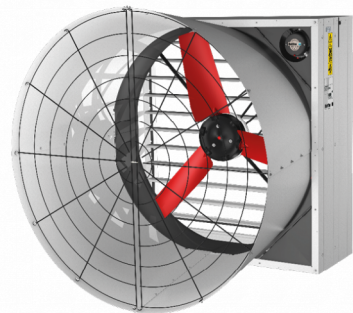


Please note: Picture may deviate from original product



Wiring diagram
C1 - 1 Phase - Standard Startup Capacitor - CCW

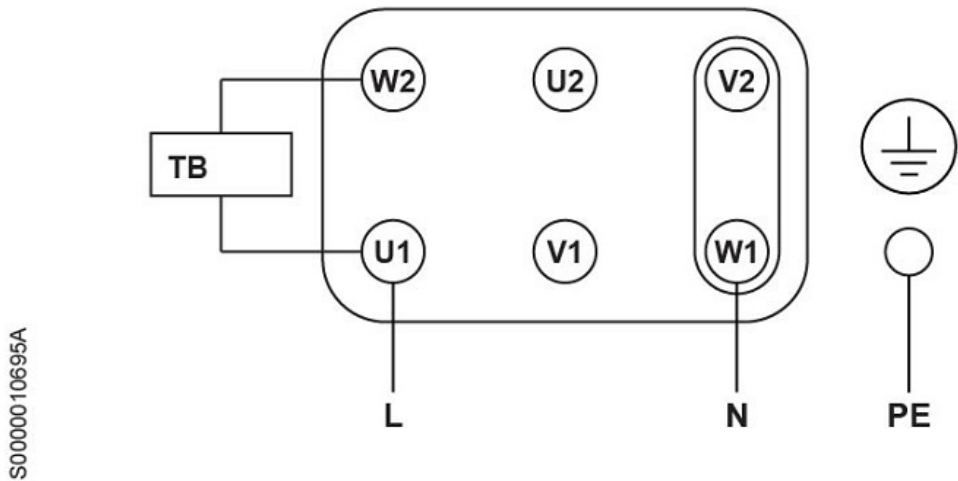

Dimensions

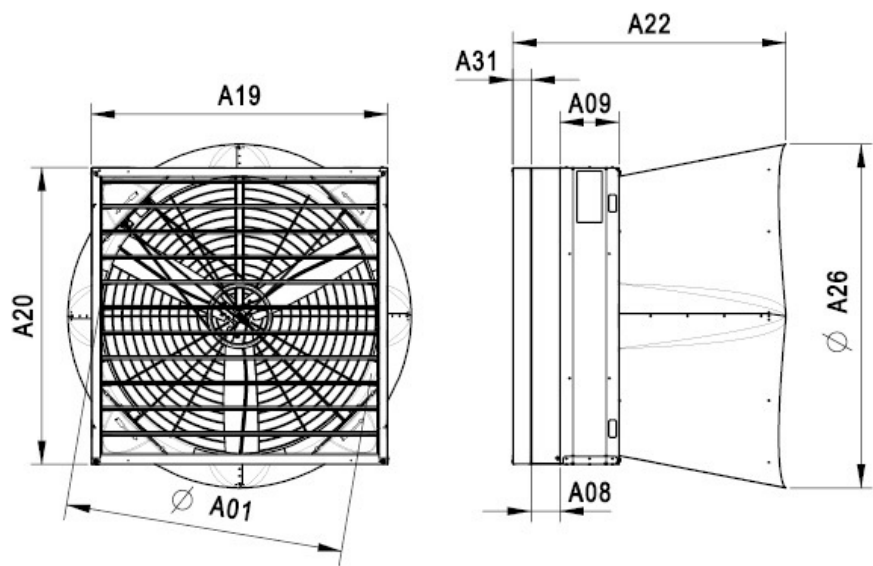

A01:	54.1 inch
A08:	5.3 inch
A09:	11.6 inch
A19:	58.3 inch
A20:	58.3 inch
A22:	53.4 inch
A26:	65.2 inch
A31:	3.3 inch

