



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	3310	RPM
Power consumption	P _e	400	W
Nominal current	I _{nom}	1.8	A
Maximum current	I _{max}	2.4	A
Cos φ		0.99	
Capacitor		04/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		10.6	kg
Packing dimensions		460x460x315	mm


Fan details

Impeller blades	3
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

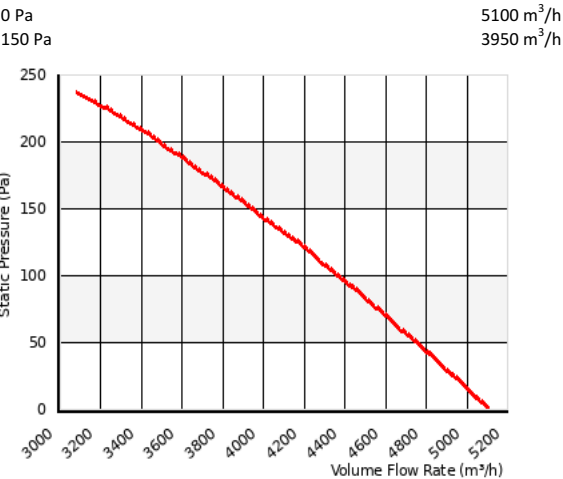

Please note: Picture may deviate from original product



Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A



