



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	905	RPM
Power consumption	P _e	1050	W
Nominal current	I _{nom}	4.1/2.4	A
Maximum current	I _{max}	5.0/2.9	A
Cos φ		0.61	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	74	db(A)
Sound pressure level (7 m)	L _p (calc.)	63	db(A)
Weight		40.9	kg
Packing dimensions		1100x190x150	mm

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0 Pa 24500 m³/h
50 Pa 20500 m³/h

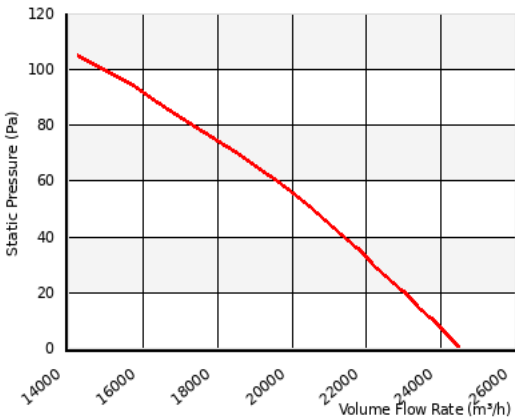

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

