



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	425	RPM
Power consumption	P _e	1065	W
Nominal current	I _{nom}	4.8	A
Maximum current	I _{max}	5.3	A
Cos φ		0.95	
Capacitor		20/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	66	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	55	dB(A)
Weight		76.2	Lbs.
Packing dimensions		31.6x15.8x16.8	inch

Fan details


Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics


0.00 in. wg	28350 CFM
-------------	-----------



Please note: Picture may deviate from original product

Approval(s)







Wiring diagram

C1 - 1 Phase - Standard Startup Capacitor - CW

S0000010695A

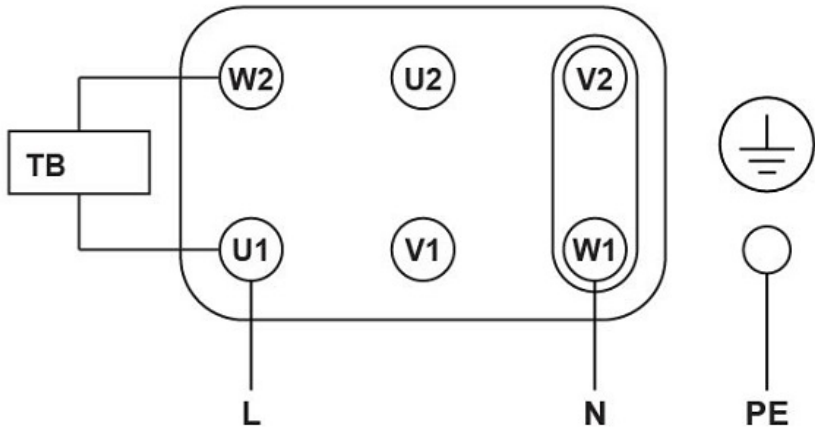

Dimensions

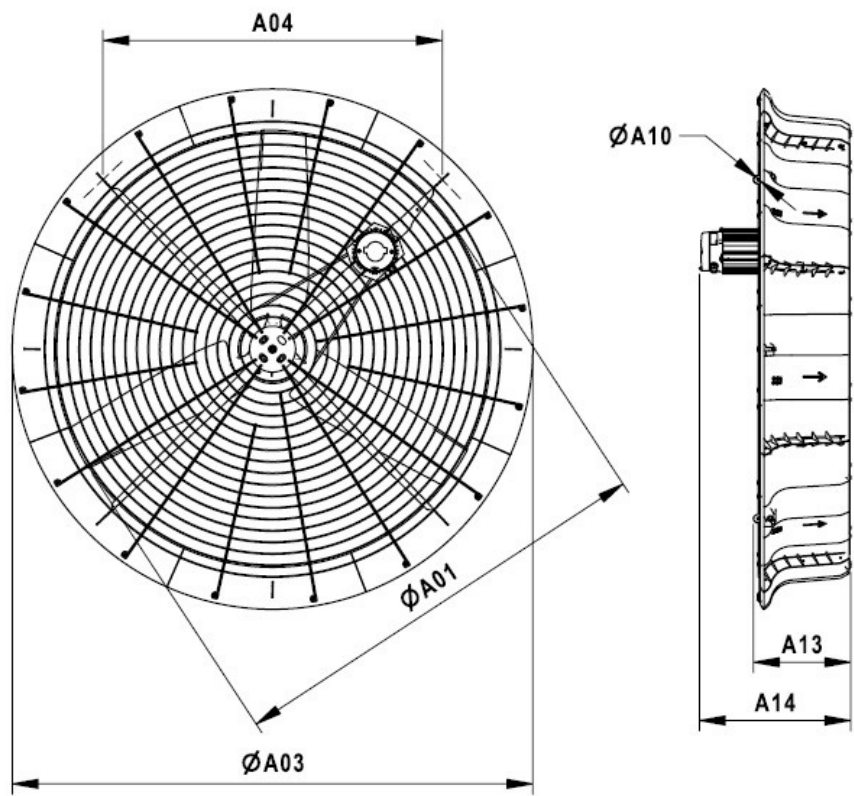

A01:	60.0 inch
A03:	71.3 inch
A04:	46.5 inch
A10:	0.6 inch
A13:	13.3 inch
A14:	21.1 inch