



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1165	RPM
Power consumption	P _e	1050	W
Nominal current	I _{nom}	3.8/2.2	A
Maximum current	I _{max}	4.7/2.7	A
Cos φ		0.6	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	83	dB(A)
Sound pressure level (7 m)	L _p (calc.)	73	dB(A)
Weight		29.4	kg
Packing dimensions		204.5x1000x1000	mm


Fan details

Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

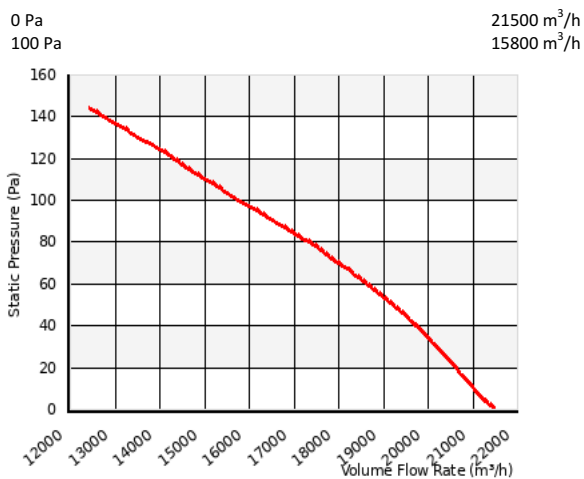

Please note: Picture may deviate from original product

Approval(s)


Motor approval
CE **UL**



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

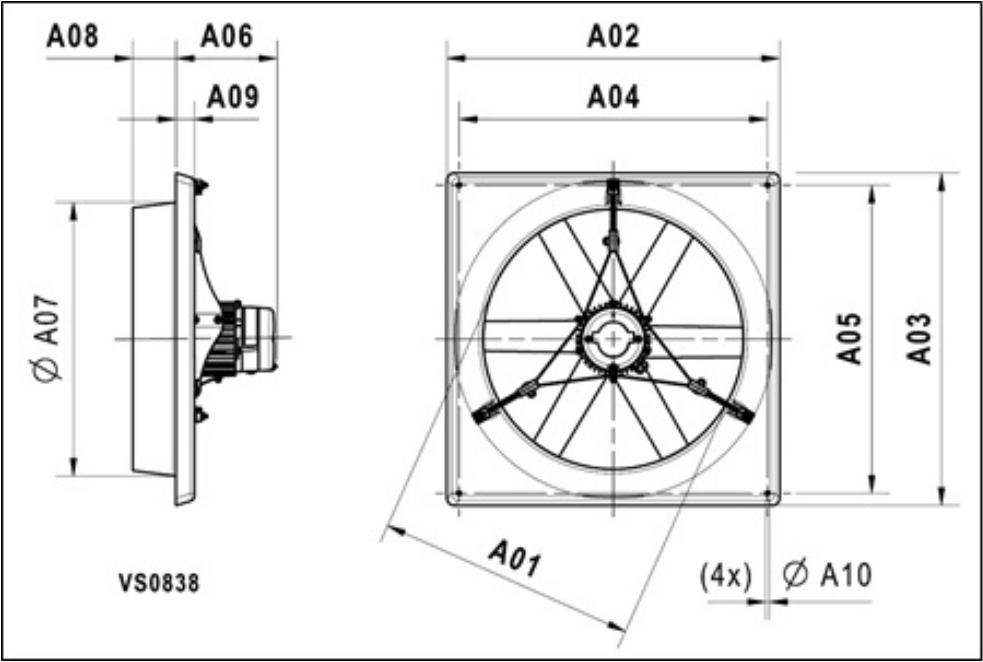

A01:	915 mm
A02:	1005 mm
A03:	1005 mm
A04:	947 mm
A05:	947 mm
A06:	247 mm
A07:	940 mm
A08:	93 mm
A09:	40 mm
A10:	10 mm

