



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1735	RPM
Power consumption	P _e	170	W
Nominal current	I _{nom}	0.7/0.4	A
Maximum current	I _{max}	0.9/0.5	A
Cos φ		0.56	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	64	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	53	dB(A)
Weight		21.6	Lbs.
Packing dimensions		20.1x20.1x12.4	inch

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg	2240 CFM
0.20 in. wg	1970 CFM

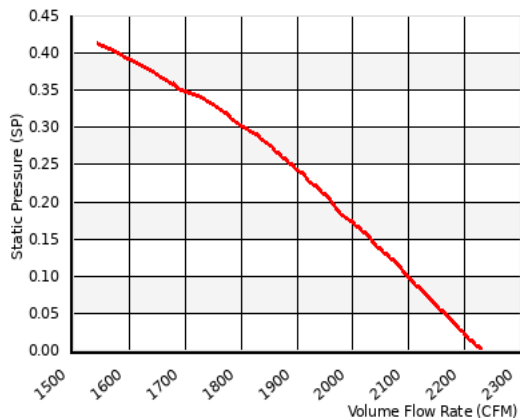

Please note: Picture may deviate from original product


Approval(s)

Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW

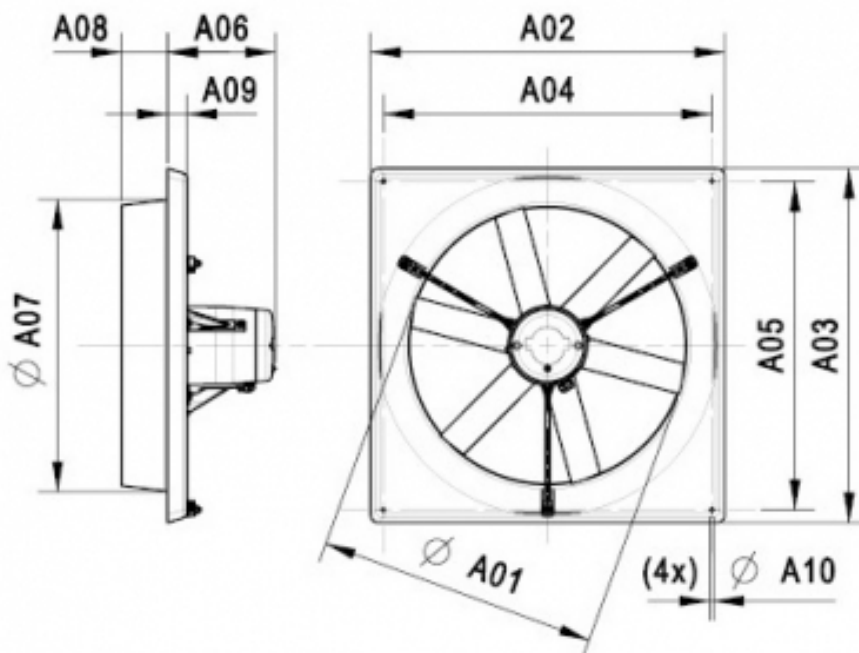

Dimensions	
	A01:
	A02:
	A03:
	A04:
	A05:
	A06:
	A07:
	A08:
	A09:
	A10:

A01:	14.3 inch
A02:	19.4 inch
A03:	19.4 inch
A04:	17.5 inch
A05:	17.5 inch
A06:	7.6 inch
A07:	15.4 inch
A08:	3.3 inch
A09:	1.4 inch
A10:	0.3 inch

