



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1145	RPM
Power consumption	P _e	790	W
Nominal current	I _{nom}	2.5/1.5	A
Maximum current	I _{max}	2.8/1.7	A
Cos φ		0.69	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		56.2	Lbs.
Packing dimensions		34.3x34.3x15.6	inch

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	9180 CFM
0.40 in. wg	6890 CFM

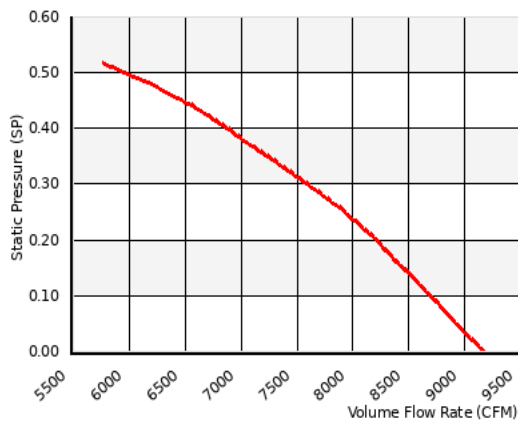

Please note: Picture may deviate from original product

Approval(s)


Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

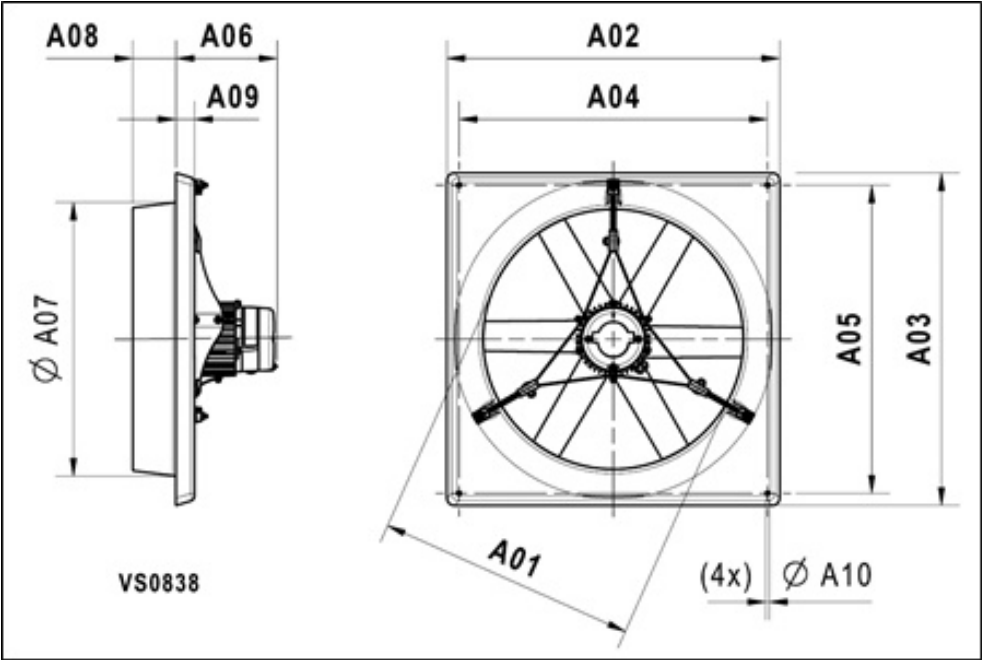

A01:	25.4 inch
A02:	30.5 inch
A03:	30.5 inch
A04:	28.1 inch
A05:	28.1 inch
A06:	9.7 inch
A07:	26.4 inch
A08:	4.1 inch
A09:	1.6 inch
A10:	0.4 inch

