



Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	1455	RPM
Power consumption	P _e	330	W
Nominal current	I _{nom}	3.3	A
Maximum current	I _{max}	3.8	A
Cos φ		0.44	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	67	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	56	dB(A)
Weight		21.8	Lbs.
Packing dimensions		20.1x20.1x12.4	inch

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options


Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg 4060 CFM
 0.20 in. wg 3530 CFM

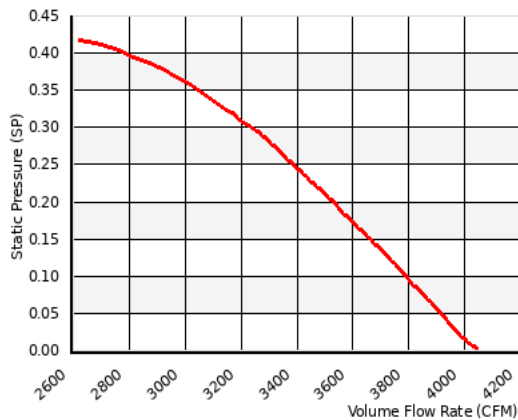


Speed control diagram

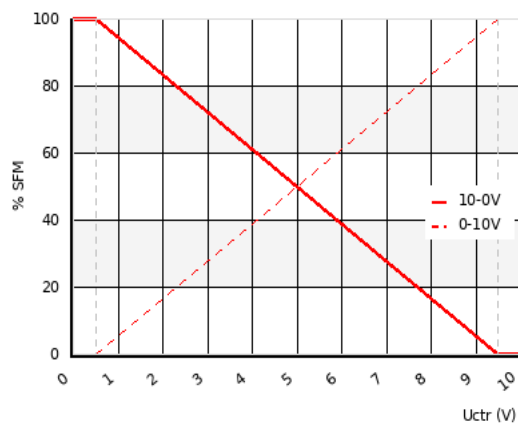

Please note: Picture may deviate from original product

Wiring diagram

CC03 - 3 Phase - Delta connected + MFD33S --

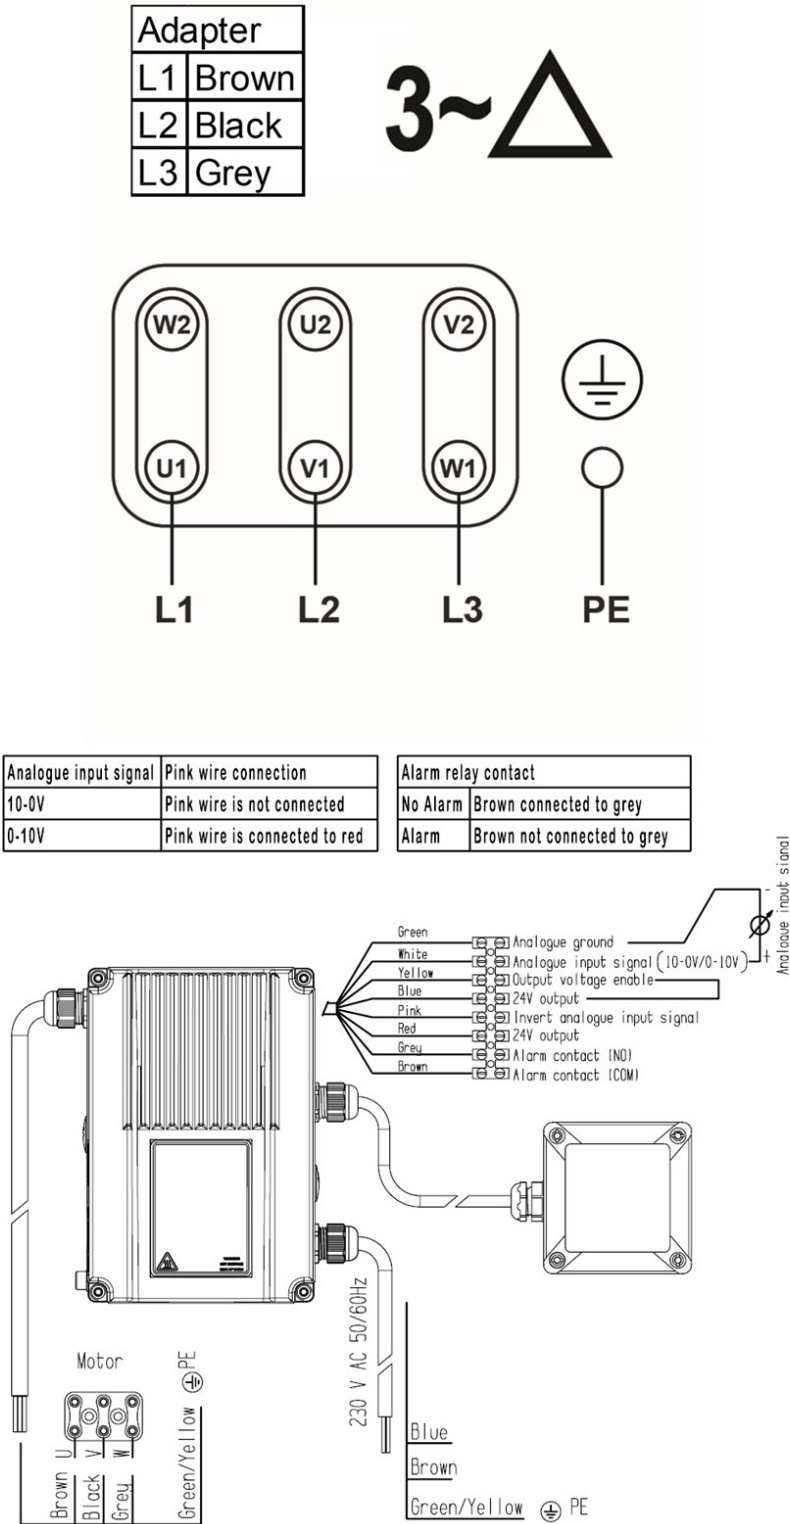

Dimensions

