

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1110	RPM
Power consumption	P _e	260	W
Nominal current	I _{nom}	1.2	A
Maximum current	I _{max}	1.5	A
Cos φ		0.93	
Capacitor		06/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		40.0	Lbs.
Packing dimensions		28.3x28.3x15.7	inch

Fan details


Impeller blades	3
Impeller type	4
Impeller system	K
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No


Characteristics


0.00 in. wg	5870 CFM
-------------	----------

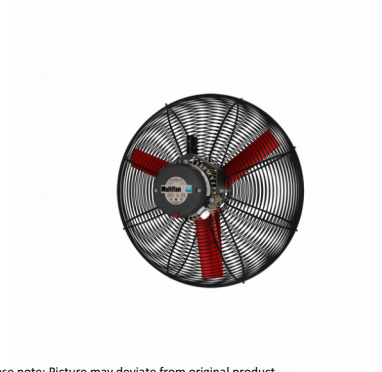

Please note: Picture may deviate from original product

Wiring diagram
C1 - 1 Phase - Standard - CCW

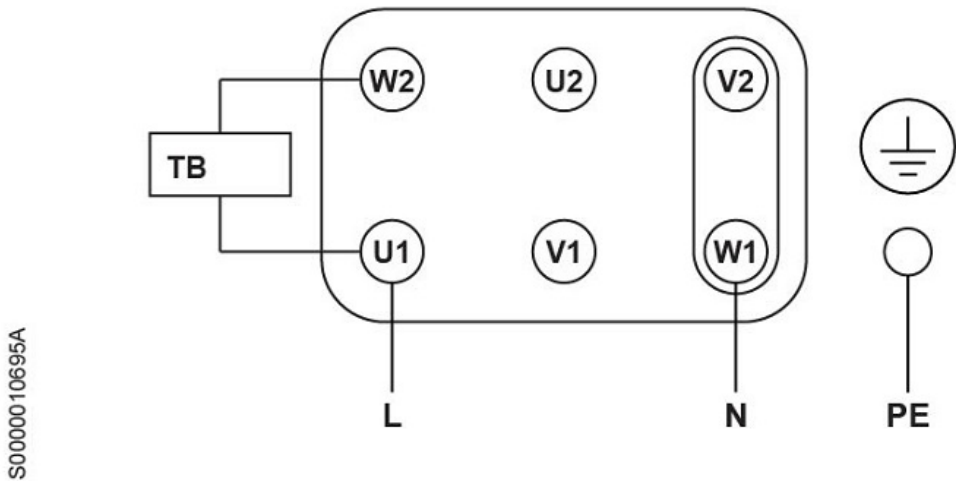

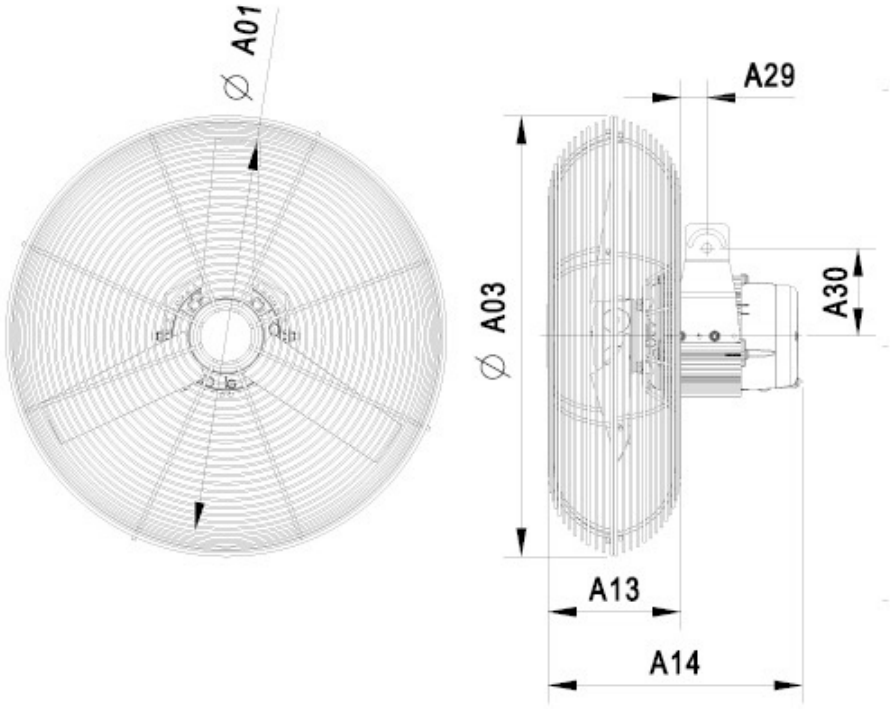Dimensions			
		A01:	24.0 inch
		A03:	26.9 inch
		A13:	8.1 inch
		A14:	13.8 inch
		A29:	1.3 inch
		A30:	4.5 inch
		VOSTERMANS VENTILATION	
Vostermans Ventilation B.V. Venlo - The Netherlands +31 (0)77 389 32 32 ventilation@vostermans.com		Vostermans Ventilation Inc. Bloomington, IL - U.S.A. +1 309 827 9798 ventilation@vostermansusa.com	
		Vostermans Ventilation Ltd. Co. Shanghai - China +86 21 5290 2889/2899 ventilation@vostermanschina.com	
		Vostermans Ventilation Sdn. Bhd. Tmn Klang Jaya - Malaysia +60 (0)33324 3638 ventilation@vostermansasia.com	