



Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	600	RPM
Power consumption	P _e	1550	W
Nominal current	I _{nom}	10.5	A
Maximum current	I _{max}	15.0	A
Cos φ		0.62	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	76	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	66	dB(A)
Weight		283.6	Lbs.

Fan details


Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options


Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg 37600 CFM
0.20 in. wg 31800 CFM

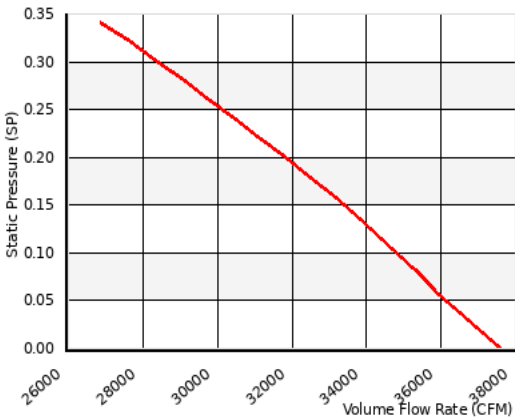

Speed control diagram

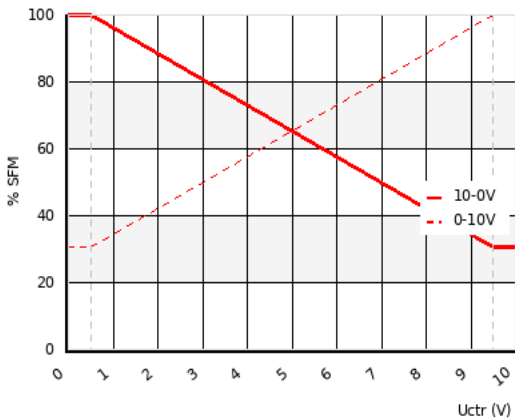


Please note: Picture may deviate from original product

Approval(s)



Dimensions

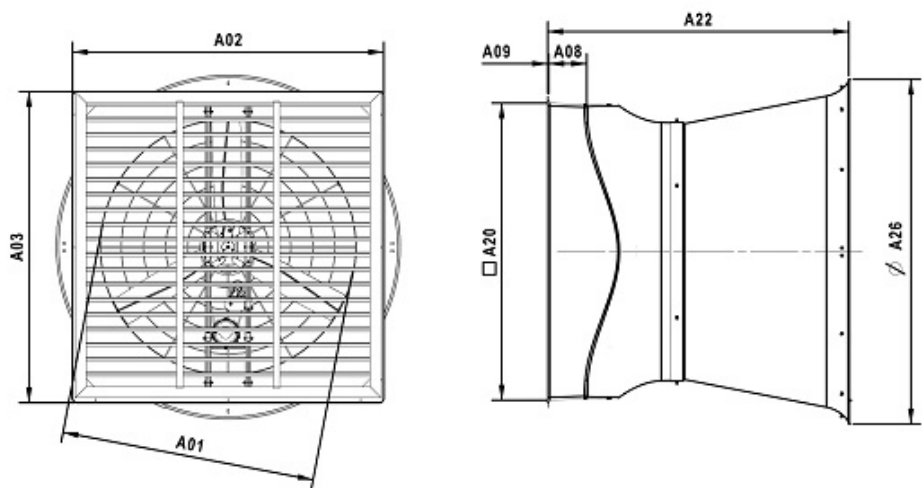

A01:	53.9 inch
A02:	67.3 inch
A03:	67.3 inch
A04:	67.3 inch
A05:	7.0 inch
A06:	0.4 inch
A07:	63.8 inch
A08:	65.0 inch
A09:	73.8 inch