



Technical data

Voltage	U	240	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1650	RPM
Power consumption	P _e	1700	W
Nominal current	I _{nom}	7.4	A
Maximum current	I _{max}	8.7	A
Cos φ		0.94	
Capacitor		22/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	81	db(A)
Sound pressure level (7 m)	L _p (calc.)	70	db(A)
Weight		22.6	kg


Fan details

Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

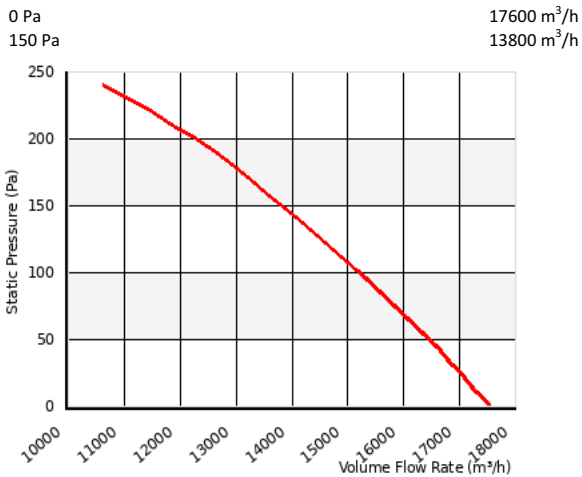



Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

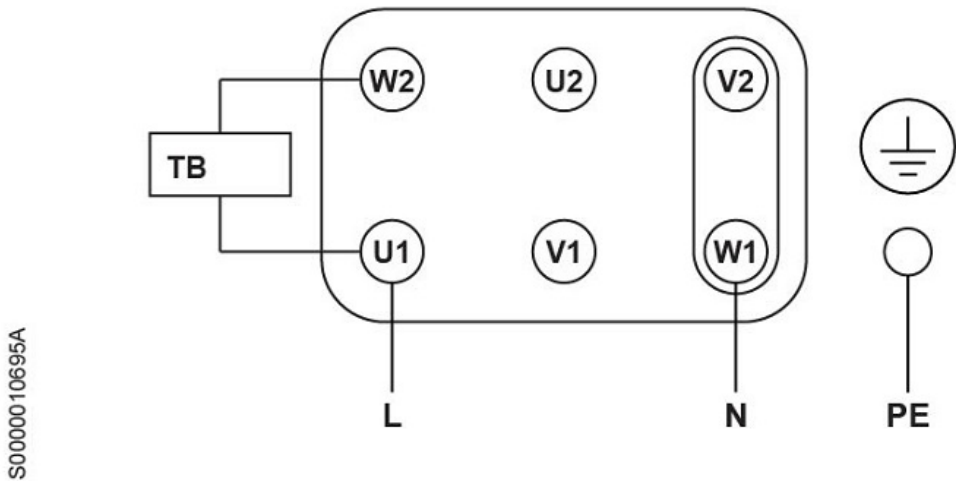

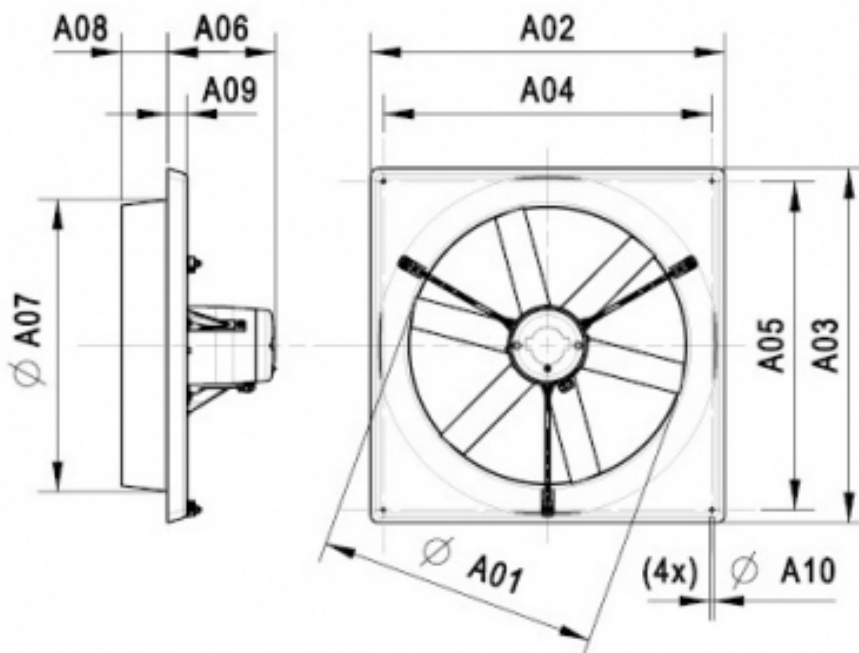Dimensions	
	A01:
	A02:
	A03:
	A04:
	A05:
	A06:
	A07:
	A08:
	A09:
	A10:

A01:	646 mm
A02:	775 mm
A03:	775 mm
A04:	715 mm
A05:	715 mm
A06:	247 mm
A07:	670 mm
A08:	105 mm
A09:	40 mm
A10:	10 mm

