

Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	415	RPM
Power consumption	P _e	650	W
Nominal current	I _{nom}	4.6	A
Maximum current	I _{max}	4.8	A
Cos φ		0.61	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	60	db(A)
Sound pressure level (7 m)	L _p (calc.)	49	db(A)
Weight		125.5	kg
Packing dimensions		1740x850x1880	mm


Fan details

Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

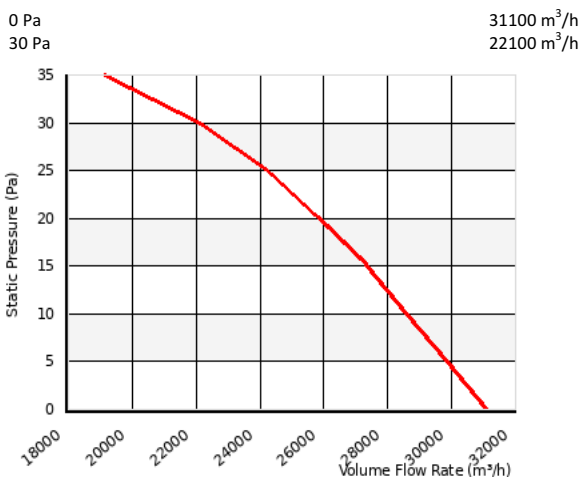


Please note: Picture may deviate from original product

Approval(s)



Dimensions

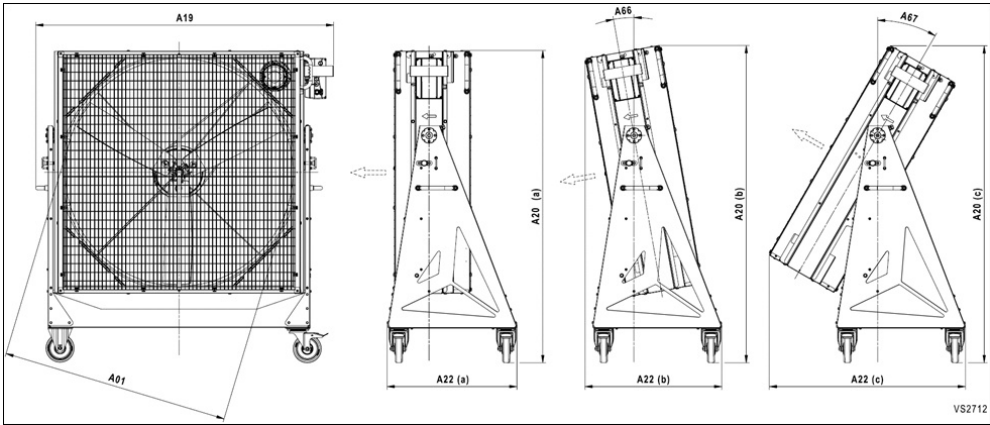

A01:	1284 mm
A19:	1671 mm
A20:	1784 mm
A20 (b):	1810 mm
A20 (c):	1815 mm
A22:	741.5 mm
A22 (b):	781.5 mm
A22 (c):	967 mm
A66:	10°
A67:	18°