



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1650	RPM
Power consumption	P _e	330	W
Nominal current	I _{nom}	1.5	A
Maximum current	I _{max}	2.0	A
Cos φ		0.99	
Capacitor		08/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	67	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	56	dB(A)
Weight		11.7	kg
Packing dimensions		620x620x315	mm


Fan details

Impeller blades	4
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

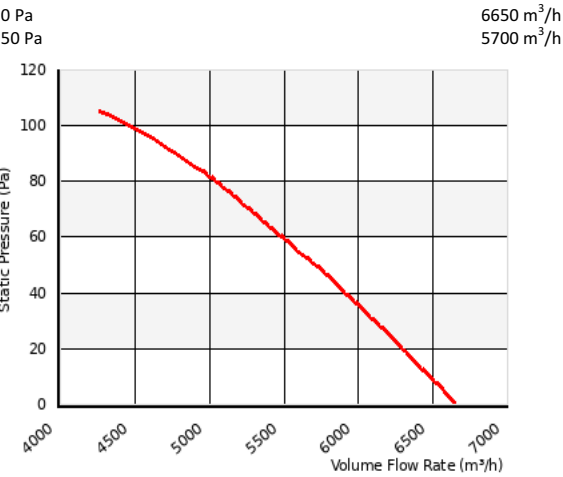


Please note: Picture may deviate from original product

Approval(s)

Motor approval
cULus







Wiring diagram

C1 - 1 Phase - Standard - CCW

S0000010695A

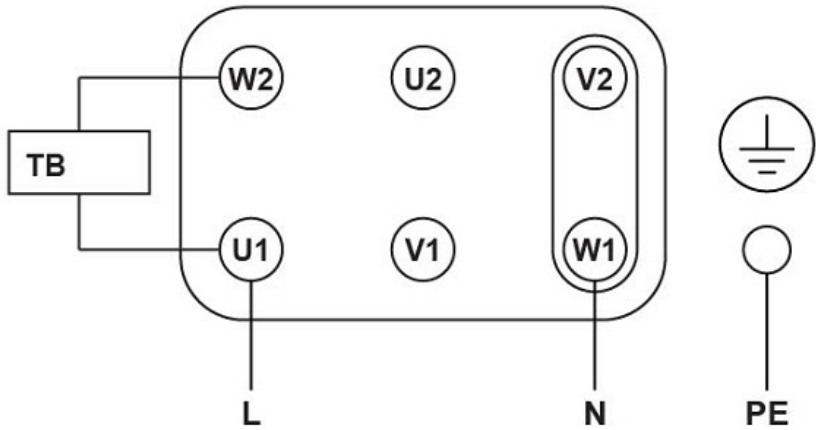

Dimensions

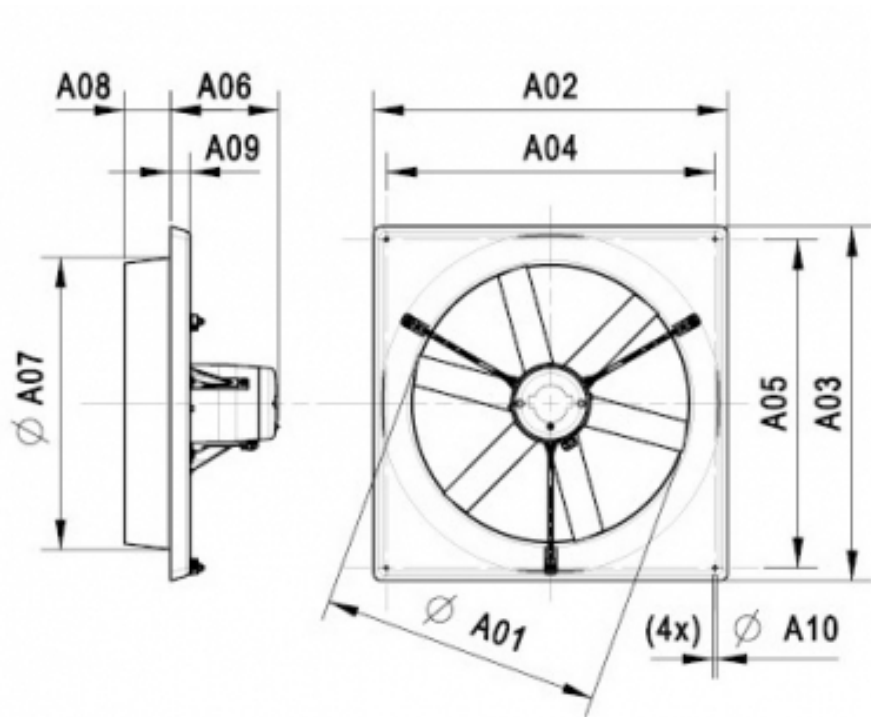

A01:	460 mm
A02:	592.5 mm
A03:	592.5 mm
A04:	545 mm
A05:	545 mm
A06:	192 mm
A07:	490 mm
A08:	84 mm
A09:	36 mm
A10:	7.5 mm