



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	525	RPM
Power consumption	P _e	1150	W
Nominal current	I _{nom}	4.7/2.7	A
Maximum current	I _{max}	5.1/3.0	A
Cos φ		0.6	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		279.9	Lbs.

Fan details



Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg	30050 CFM
0.12 in. wg	26400 CFM

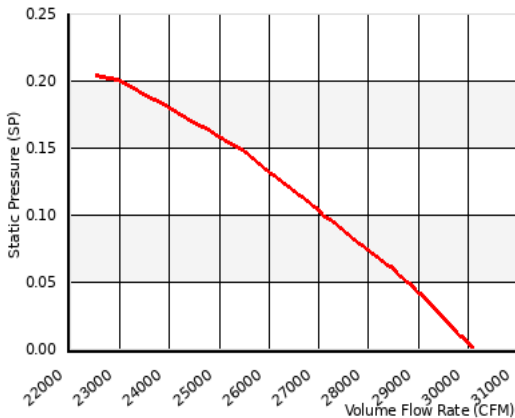

Please note: Picture may deviate from original product

Approval(s)



No.15510



VOSTERMANS
VENTILATION


Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com


Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Wiring diagram
C11 - 3 Phase - Y connection - CW

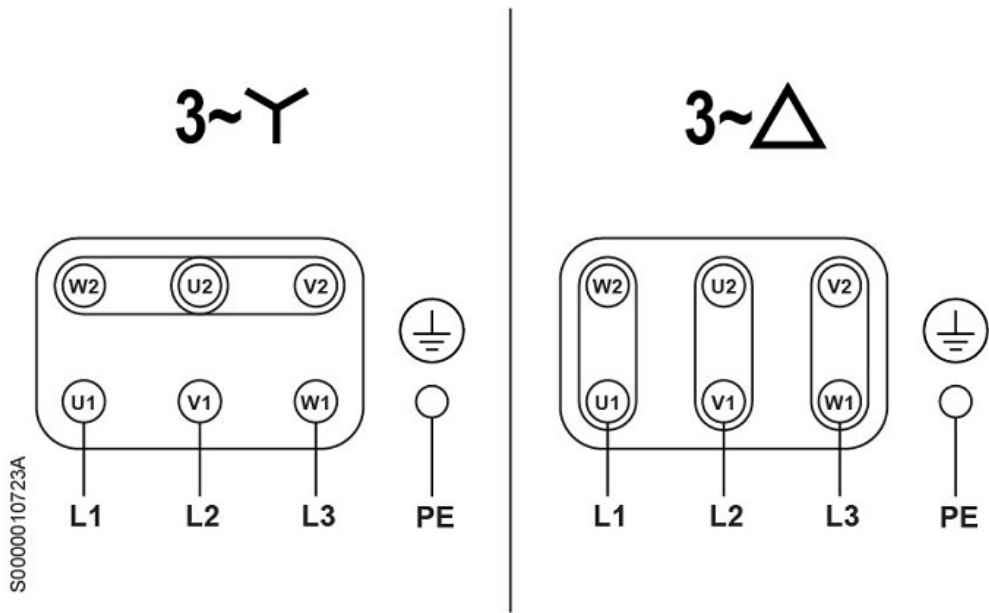

Dimensions

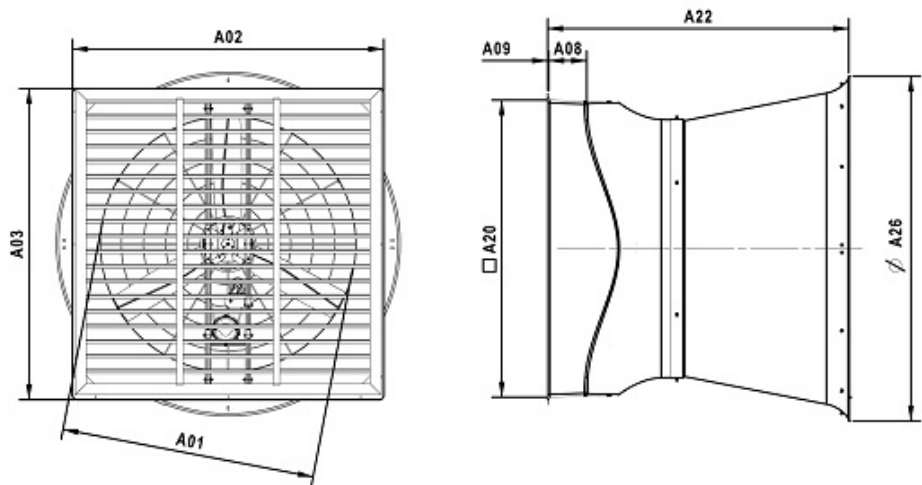

A01:	53.9 inch
A02:	67.3 inch
A03:	67.3 inch
A04:	67.3 inch
A05:	7.0 inch
A06:	0.4 inch
A07:	63.8 inch
A08:	65.0 inch
A09:	73.8 inch

