



Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1385	RPM
Power consumption	P _e	400	W
Nominal current	I	1.8	A
Maximum current	I	2.9	A
Capacitor		10/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level	L _p	70	dB(A)
Sound pressure level distance		2	m
Weight		16.6	kg
Packing dimensions		670x670x315	mm

Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP


Control options

Triac controller	Yes
Transformer	Yes
Intelligent Fan Drive	Yes
RFREINV7 control	Yes


* This fan is suitable for 1~ frequency control with the Invertek Optidrive type RFREINV7. This Invertek Optidrive RFREINV7 is equipped with a special Vostermans Ventilation BV parameter set. This Invertek Optidrive RFREINV7 is available from Vostermans Ventilation BV.

Characteristics

0 Pa	8350 m ³ /h
50 Pa	7200 m ³ /h

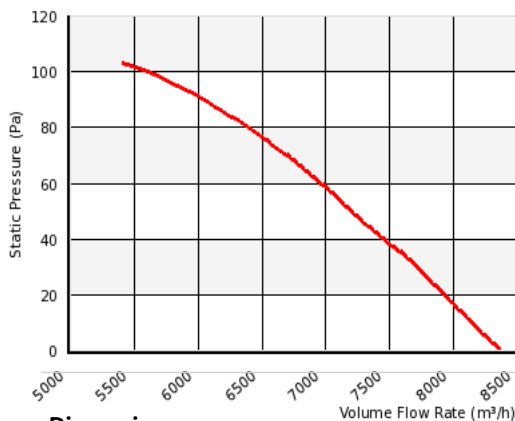

Dimensions

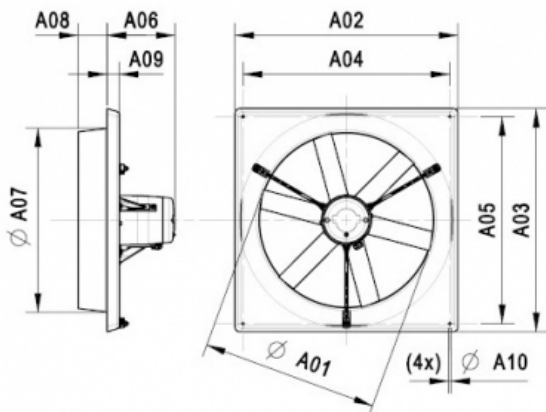

A01:	512 mm
A02:	648 mm
A03:	648 mm
A04:	600 mm
A05:	600 mm
A06:	192 mm
A07:	540 mm
A08:	84 mm
A09:	36 mm
A10:	8 mm



Please note: Picture may deviate from original product

Approval(s)



Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

