

Technical data

Voltage	U	240	V
Phase	1	~	
Frequency	f	60	Hz
Speed	n	590	RPM
Power consumption	P _e	1650	W
Nominal current	I _{nom}	7	A
Maximum current	I _{max}	7.5	A
Cos φ		0.98	
Capacitor		32/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		163.3	Lbs.
Packing dimensions		54.5x18.1x54.5	inch

Fan details



Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg	26300 CFM
0.20 in. wg	19750 CFM

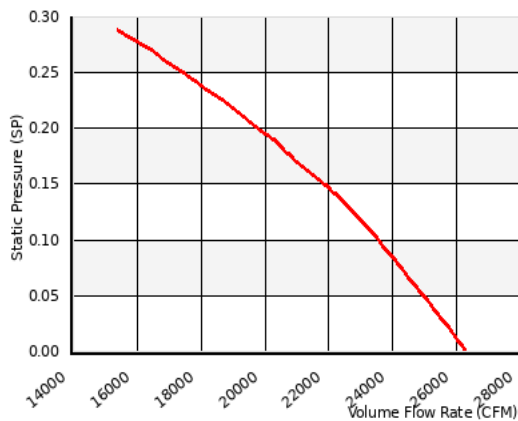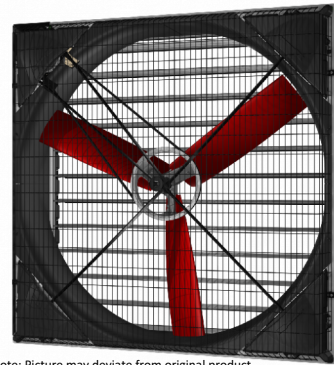

Please note: Picture may deviate from original product







Wiring diagram

C1 - 1 Phase - Standard Startup Capacitor - CCW

S0000010695A

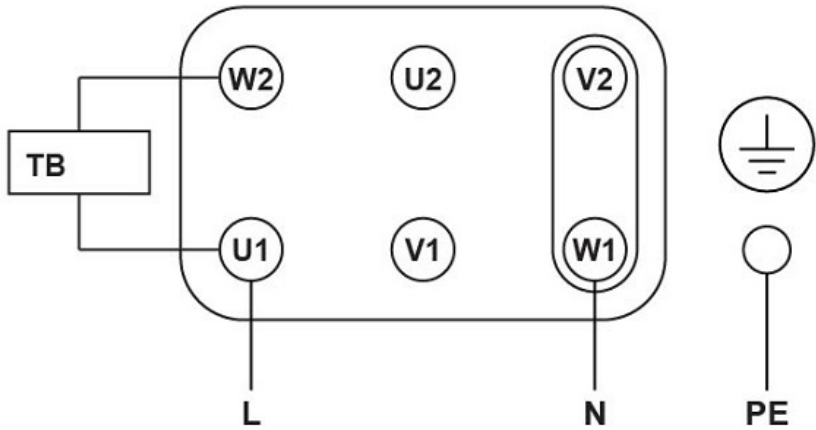

Dimensions

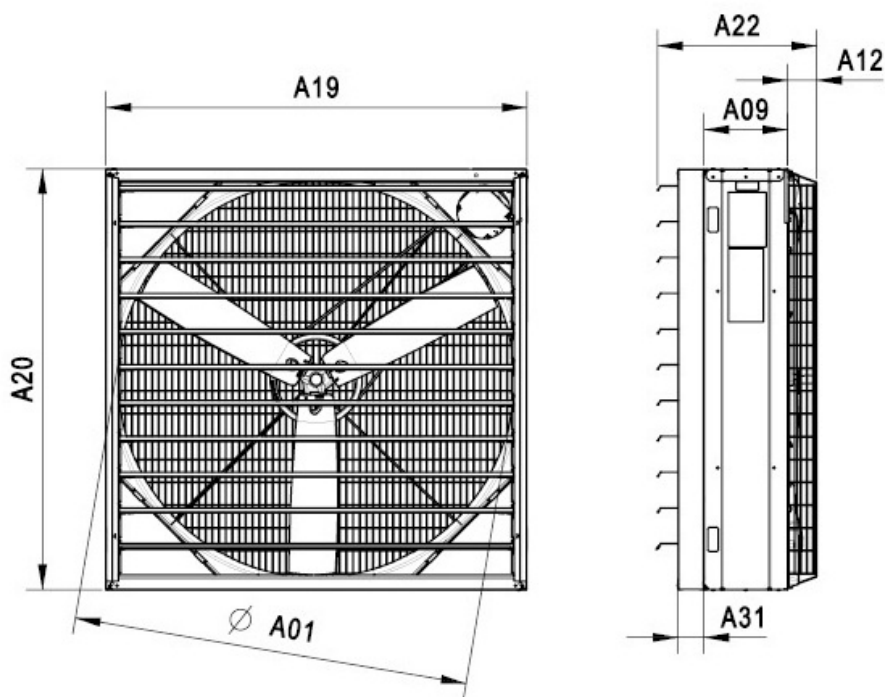

A01:	50.6 inch
A09:	10.8 inch
A12:	3.8 inch
A19:	54.4 inch
A20:	54.4 inch
A22:	20.6 inch
A31:	3.3 inch