



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1145	RPM
Power consumption	P _e	790	W
Nominal current	I _{nom}	2.5/1.5	A
Maximum current	I _{max}	2.8/1.7	A
Cos φ		0.69	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		23.8	kg
Packing dimensions		870x870x395	mm


Fan details

Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

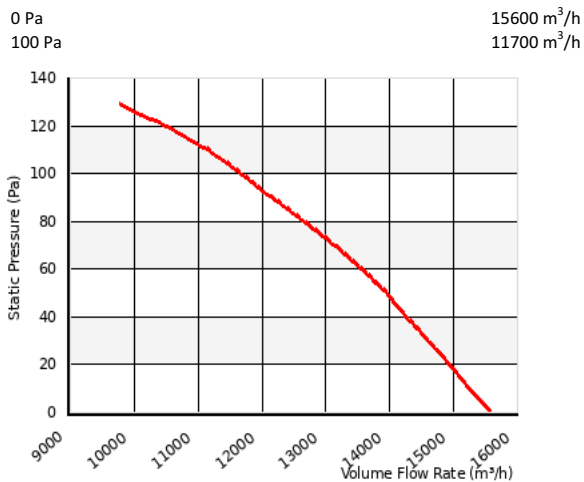


Please note: Picture may deviate from original product

Approval(s)

Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW

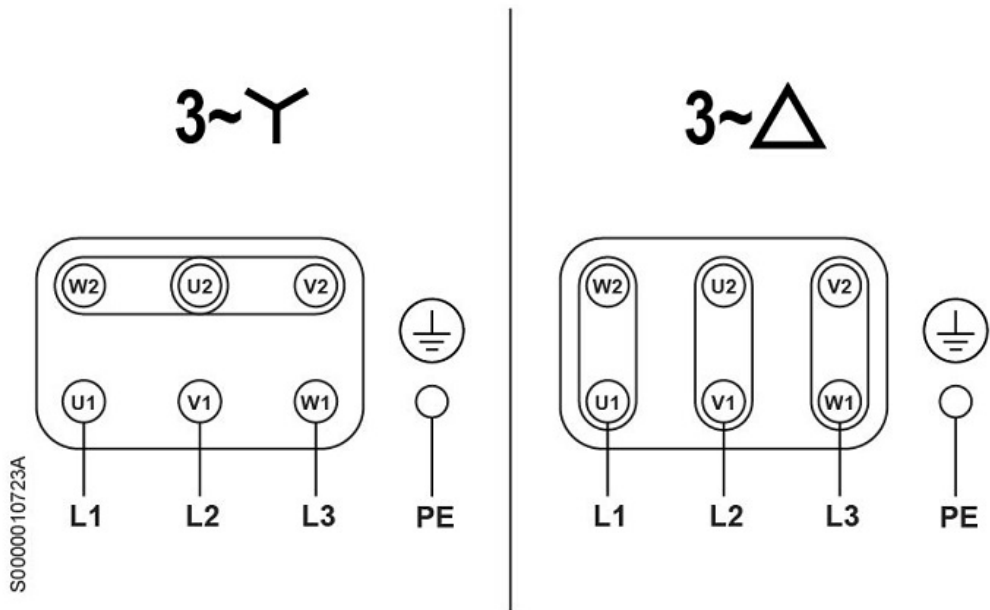

Dimensions

