

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	510	RPM
Power consumption	P _e	1050	W
Nominal current	I _{nom}	4.8	A
Maximum current	I _{max}	5.8	A
Cos φ		0.96	
Capacitor		24/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		279.0	Lbs.

Fan details



Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg	29700 CFM
0.12 in. wg	25950 CFM

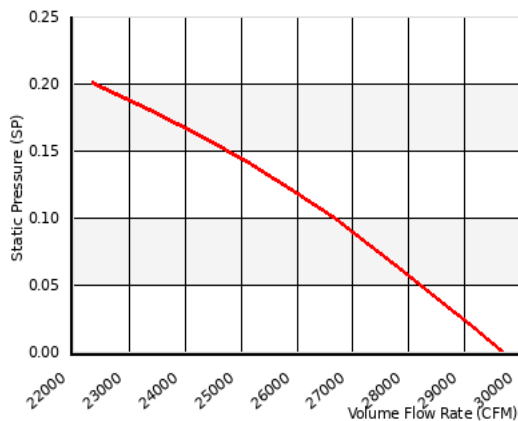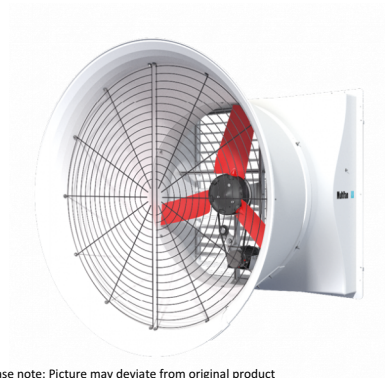

Please note: Picture may deviate from original product




No.16162




Wiring diagram

C1 - 1 Phase - Standard Startup Capacitor - CW

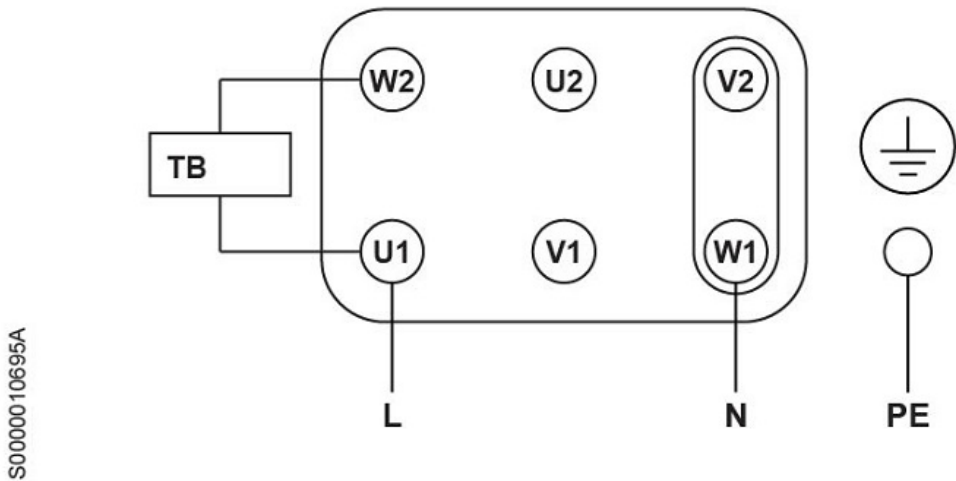

Dimensions

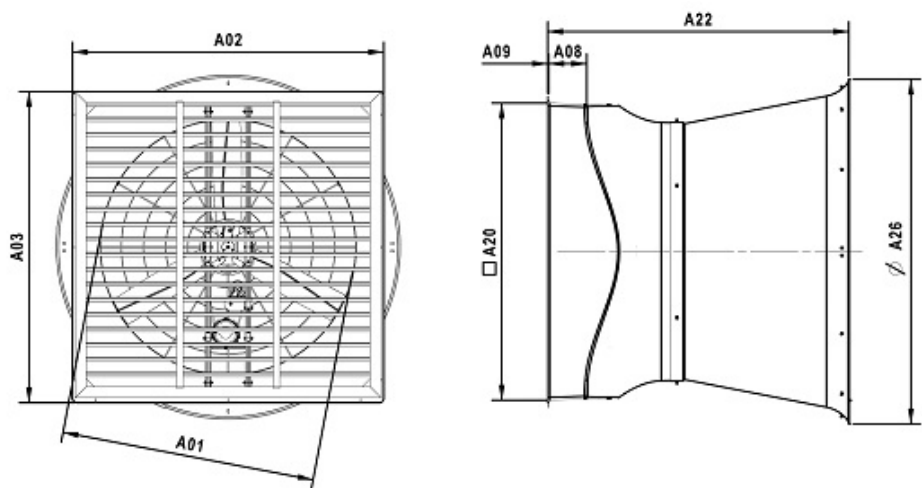

A01:	53.9 inch
A02:	67.3 inch
A03:	67.3 inch
A08:	7.0 inch
A09:	0.4 inch
A20:	63.8 inch
A22:	65.0 inch
A26:	73.8 inch