

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	555	RPM
Power consumption	P _e	1700	W
Nominal current	I _{nom}	5.7/3.3	A
Maximum current	I _{max}	6.6/3.8	A
Cos φ		0.75	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Packing dimensions		53.9x15.7x53.9	inch

Fan details



Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg	32250 CFM
0.20 in. wg	25050 CFM

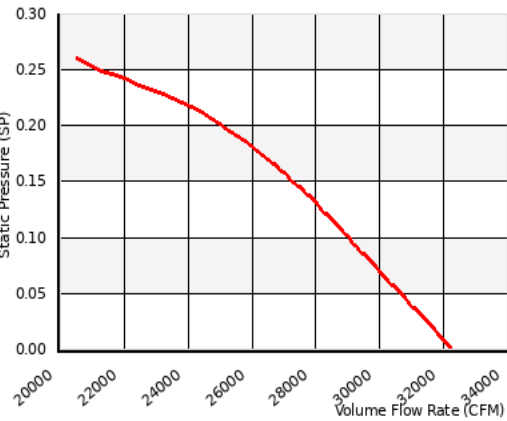


Please note: Picture may deviate from original product



Wiring diagram
C11 - 3 Phase - Y connection - CW



Dimensions

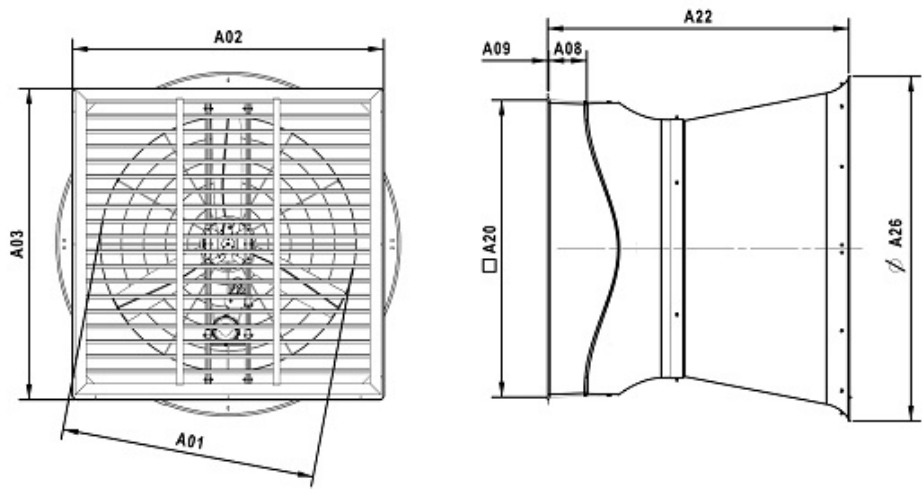

A01:	54.6 inch
A02:	63.9 inch
A03:	63.9 inch
A08:	10.7 inch
A09:	0.3 inch
A22:	57.6 inch
A22 (c):	57.6 inch
A26:	61.9 inch