

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	3310	RPM
Power consumption	P _e	400	W
Nominal current	I _{nom}	1.8	A
Maximum current	I _{max}	2.4	A
Cos φ		0.99	
Capacitor		04/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		23.5	Lbs.
Packing dimensions		18.1x18.1x12.4	inch

Fan details


Impeller blades	3
Impeller type	3
Impeller system	C
Impeller material	PP

Control options


Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg 3000 CFM
0.60 in. wg 2320 CFM

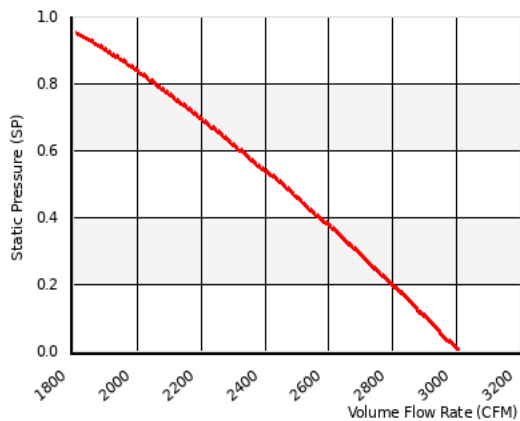

Please note: Picture may deviate from original product



Wiring diagram

C1 - 1 Phase - Standard - CCW

S0000010695A

