

Technical data

Voltage	U	240	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	590	RPM
Power consumption	P _e	1650	W
Nominal current	I _{nom}	7	A
Maximum current	I _{max}	7.5	A
Cos φ		0.98	
Capacitor		32/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		76.5	kg
Packing dimensions		400x1000x1000	mm

Fan details



Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No


Characteristics

0 Pa	44700 m ³ /h
50 Pa	33600 m ³ /h

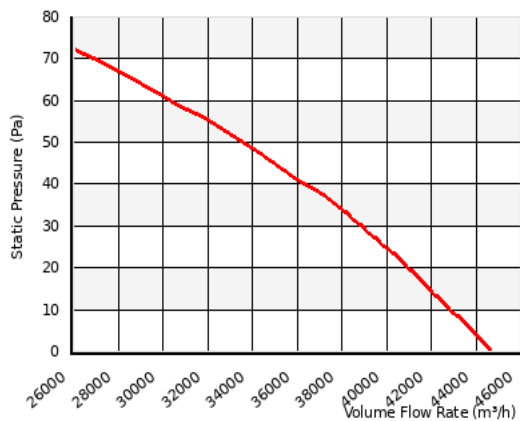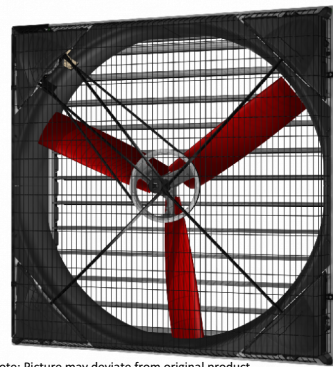

Please note: Picture may deviate from original product







Wiring diagram

C1 - 1 Phase - Standard Startup Capacitor - CCW

S0000010695A

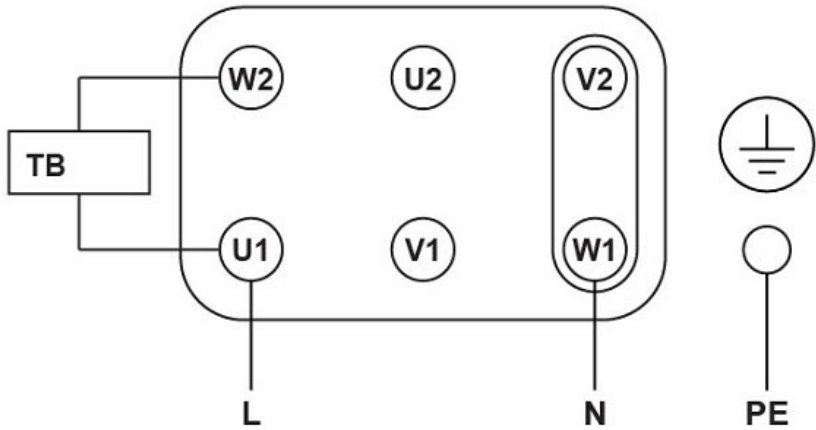

Dimensions

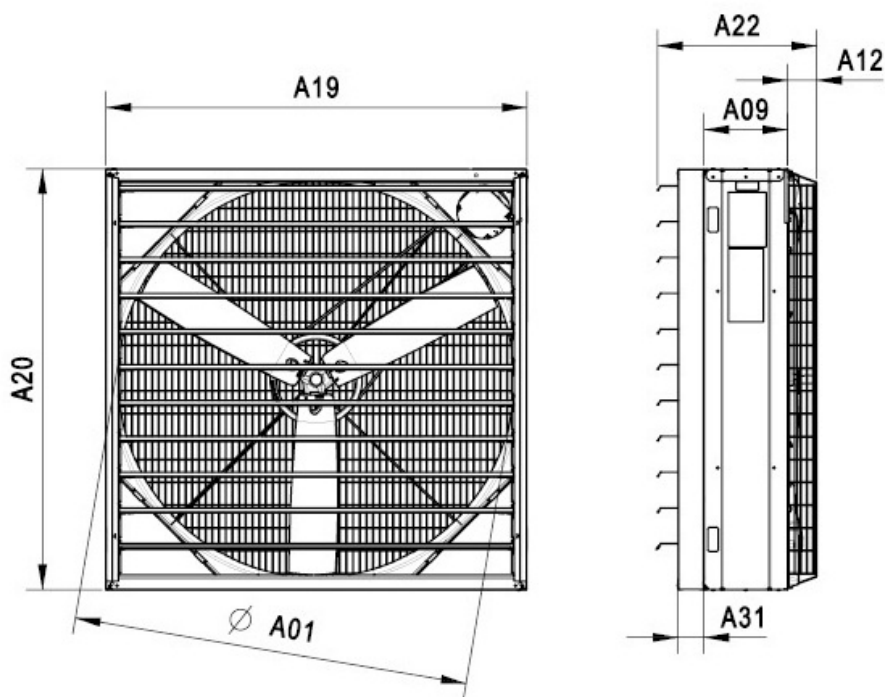

A01:	1284 mm
A09:	275 mm
A12:	96 mm
A19:	1382 mm
A20:	1382 mm
A22:	523 mm
A31:	85 mm