

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1385	RPM
Power consumption	P _e	400	W
Nominal current	I	1.8	A
Maximum current	I	2.6	A
Capacitor		10/400	µF
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CLF	
IP Class Fan		IP55	
Sound pressure level	L _p	70	dB(A)
Sound pressure level distance		6.6	ft
Weight		33.2	Lbs.
Packing dimensions		28.4x28.4x15.8	inch




Please note: Picture may deviate from original product

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes


0.00 in. wg	4910 CFM
0.20 in. wg	4240 CFM

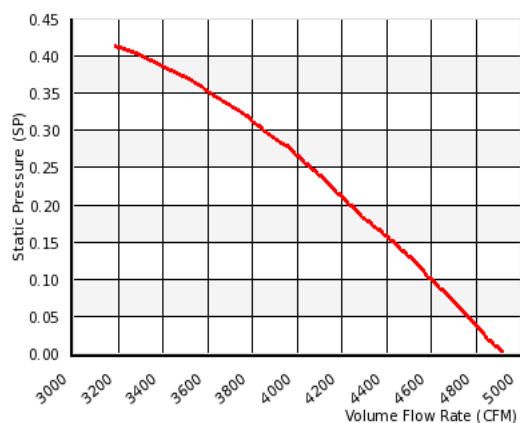

CE EAC



AA01 - 1 Phase - Standard - CCW

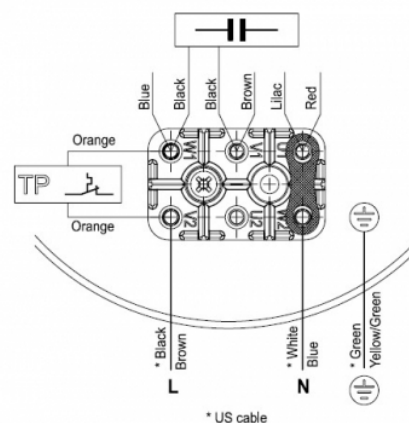

Technical drawing of the antenna assembly showing side and top views. The side view (top) shows the antenna structure with dimensions A24, A25, and A06. The top view (bottom) shows the circular antenna face with a central hub and radial spokes, with a diameter dimensioned as $\varnothing^*$. Below the top view, the text $(\varnothing^* = \text{customer dependent})$ is present.