



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	425	RPM
Power consumption	P _e	630	W
Nominal current	I _{nom}	2.5/1.4	A
Maximum current	I _{max}	2.6/1.5	A
Cos φ		0.65	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	63	db(A)
Sound pressure level (23 ft)	L _p (calc.)	52	db(A)
Weight		91.4	Lbs.
Packing dimensions		22.1x39.4x39.4	inch

Fan details


Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	23600 CFM
-------------	-----------



Please note: Picture may deviate from original product

Approval(s)




Wiring diagram
C11 - 3 Phase - Y connection - CCW



Article number: K4D13B0M11100

Basket fans

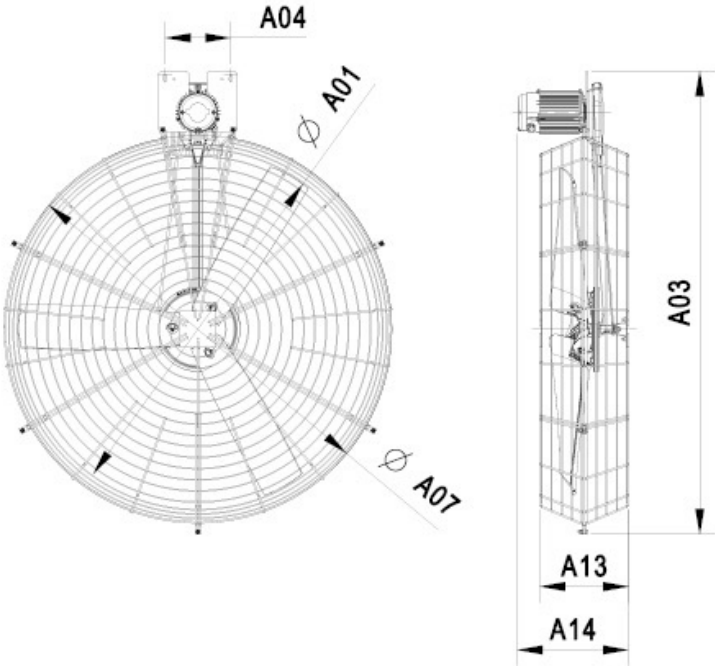Dimensions			
		A01:	50.6 inch
		A03:	65.4 inch
		A04:	9.3 inch
		A07:	54.7 inch
		A13:	12.6 inch
		A14:	15.7 inch
			
VOSTERMANS VENTILATION			
Vostermans Ventilation B.V. Venlo - The Netherlands +31 (0)77 389 32 32 ventilation@vostermans.com		Vostermans Ventilation Inc. Bloomington, IL - U.S.A. +1 309 827 9798 ventilation@vostermansusa.com	
		Vostermans Ventilation Ltd. Co. Shanghai - China +86 21 5290 2889/2899 ventilation@vostermanschina.com	
		Vostermans Ventilation Sdn. Bhd. Tmn Klang Jaya - Malaysia +60 (0)33324 3638 ventilation@vostermansasia.com	