



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1735	RPM
Power consumption	P _e	340	W
Nominal current	I _{nom}	1.3/0.8	A
Maximum current	I _{max}	1.9/1.1	A
Cos φ		0.57	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	67	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	56	dB(A)
Weight		11.6	kg
Packing dimensions		620x620x315	mm


Fan details

Impeller blades	4
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

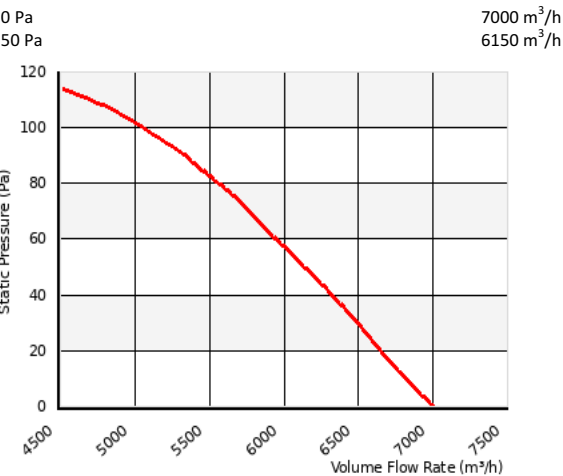


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

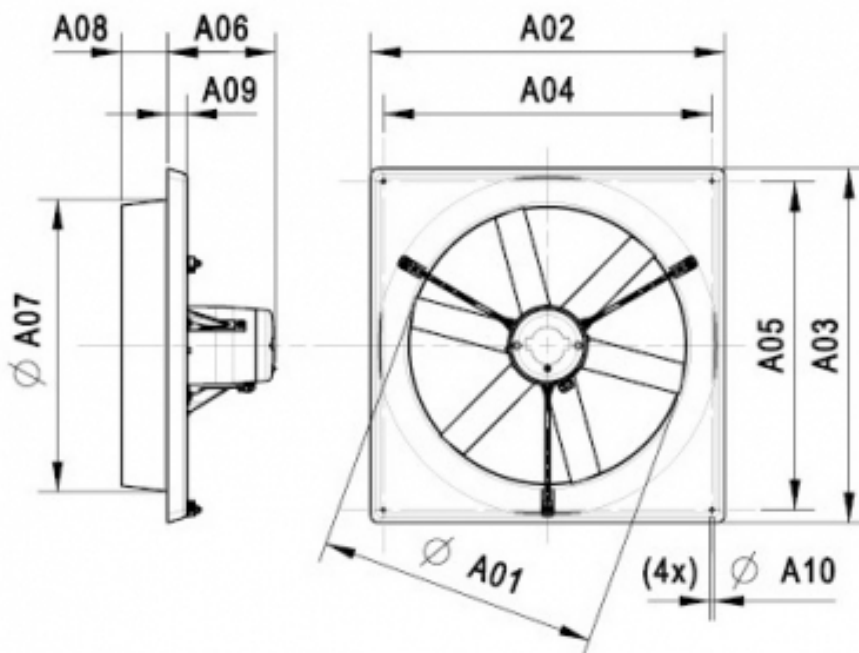

Dimensions	
	A01: 460 mm
	A02: 592.5 mm
	A03: 592.5 mm
	A04: 545 mm
	A05: 545 mm
	A06: 192 mm
	A07: 490 mm
	A08: 84 mm
	A09: 36 mm
	A10: 7.5 mm

