



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	1450	RPM
Power consumption	P _e	1750	W
Nominal current	I _{nom}	5.6/3.3	A
Maximum current	I _{max}	6.4/3.7	A
Cos φ		0.74	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	82	db(A)
Sound pressure level (7 m)	L _p (calc.)	71	db(A)
Weight		28.2	kg


Fan details

Impeller blades	4
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

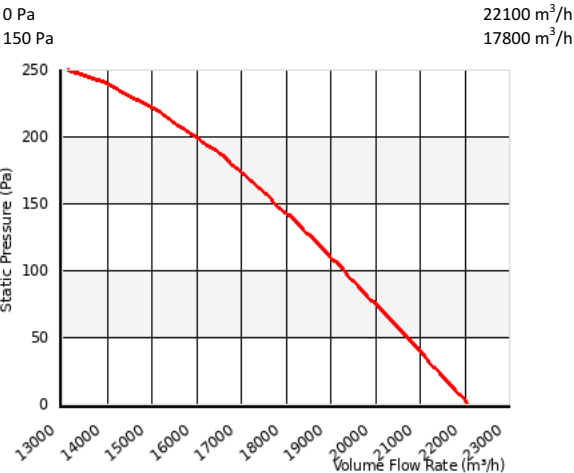

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



