

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	635	RPM
Power consumption	P _e	1800	W
Nominal current	I _{nom}	7.8/4.5	A
Maximum current	I _{max}	8.5/4.9	A
Cos φ		0.58	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		124.1	kg
Packing dimensions		16.7x1000x1000	mm

Fan details



Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0 Pa 53900 m³/h
50 Pa 44800 m³/h

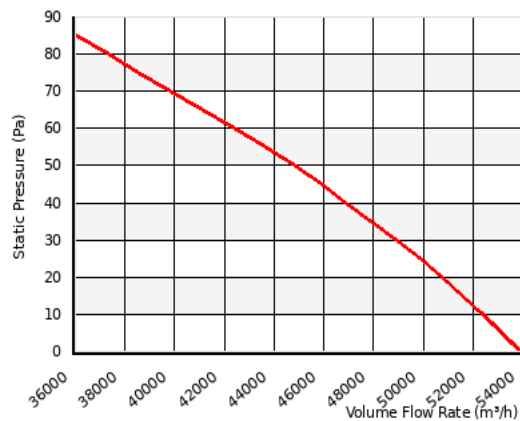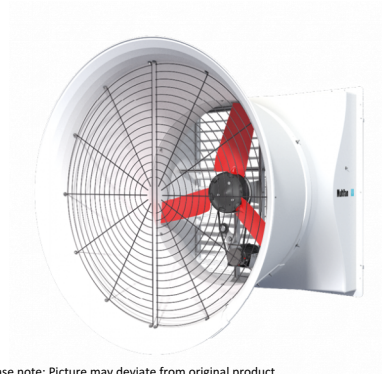

Please note: Picture may deviate from original product

Approval(s)





Wiring diagram
C11 - 3 Phase - Y connection - CW



Article number: C4D13A1M10238

FC fans - High volume

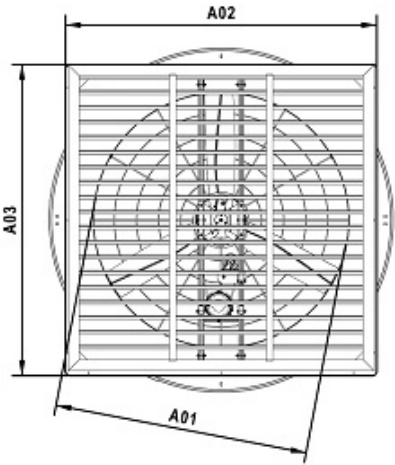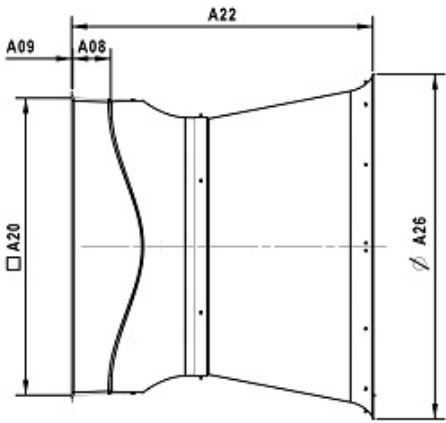Dimensions			
		A01:	1278 mm
		A02:	1530 mm
		A03:	1530 mm
		A08:	178 mm
		A09:	9 mm
		A20:	1441 mm
		A22:	1600 mm
		A26:	1769 mm



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com