



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1735	RPM
Power consumption	P _e	340	W
Nominal current	I _{nom}	1.3/0.8	A
Maximum current	I _{max}	1.9/1.1	A
Cos φ		0.57	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	67	dB(A)
Sound pressure level (7 m)	L _p (calc.)	56	dB(A)
Weight		13.0	kg
Packing dimensions		620x620x315	mm


Fan details

Impeller blades	4
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

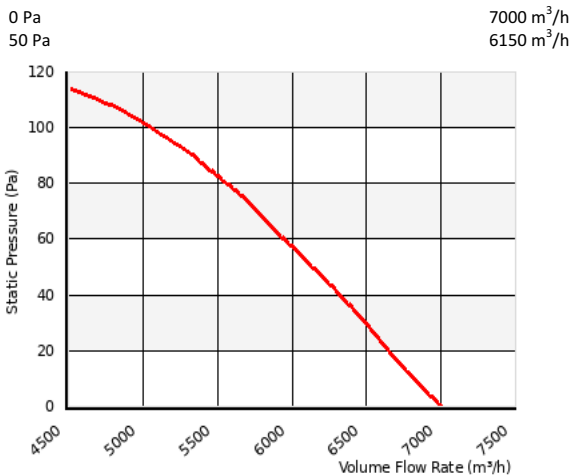

Please note: Picture may deviate from original product

Approval(s)


Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

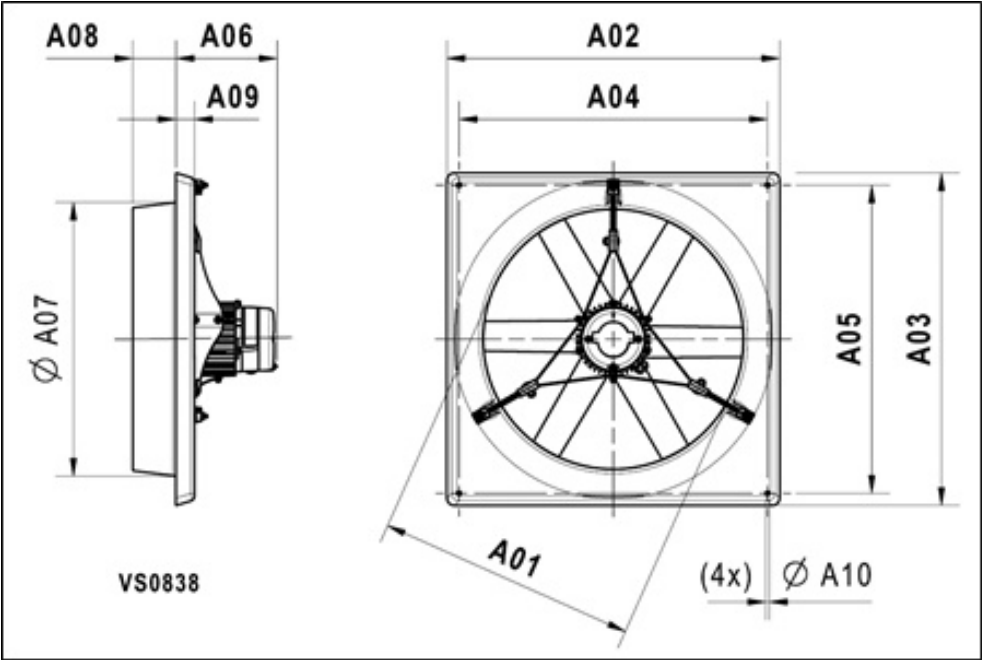

A01:	512 mm
A02:	647.5 mm
A03:	647.5 mm
A04:	600 mm
A05:	600 mm
A06:	192 mm
A07:	540 mm
A08:	84 mm
A09:	36 mm
A10:	7.5 mm

