



Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	955	RPM
Power consumption	P _e	290	W
Nominal current	I _{nom}	3	A
Maximum current	I _{max}	3.4	A
Cos φ		0.43	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	62	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	51	dB(A)
Weight		31.2	Lbs.
Packing dimensions		28.3x28.3x15.7	inch

Fan details


Impeller blades	6
Impeller type	4
Impeller system	K
Impeller material	PG

Control options


Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	5030 CFM
0.20 in. wg	3970 CFM

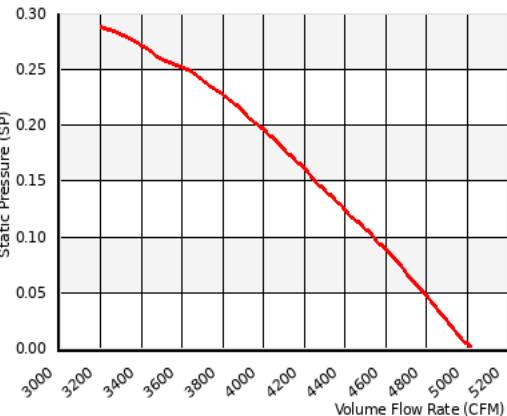

Speed control diagram

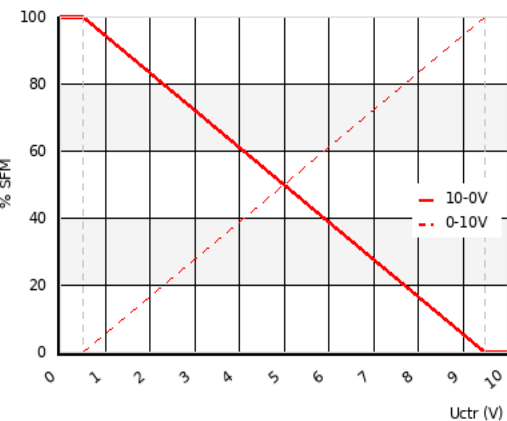


Please note: Picture may deviate from original product



Wiring diagram

CC03 - 3 Phase - Delta connected + MFD33S --

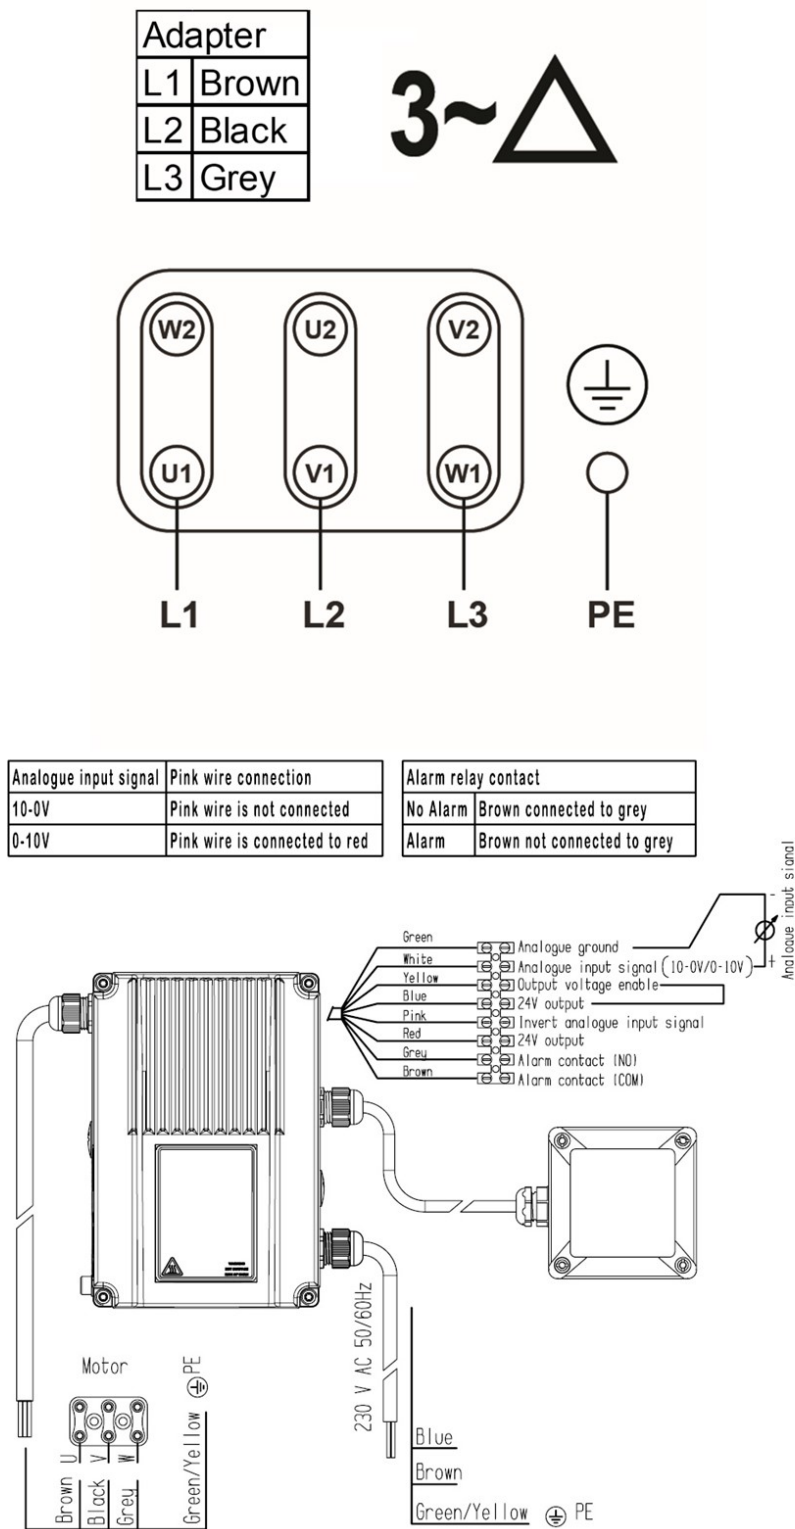

Dimensions

