

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	835	RPM
Power consumption	P _e	640	W
Nominal current	I _{nom}	3.1	A
Maximum current	I _{max}	3.8	A
Cos φ		0.9	
Capacitor		14/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	69	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	58	dB(A)
Weight		67.0	Lbs.
Packing dimensions		7.4x39.4x39.4	inch

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	13050 CFM
-------------	-----------





Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

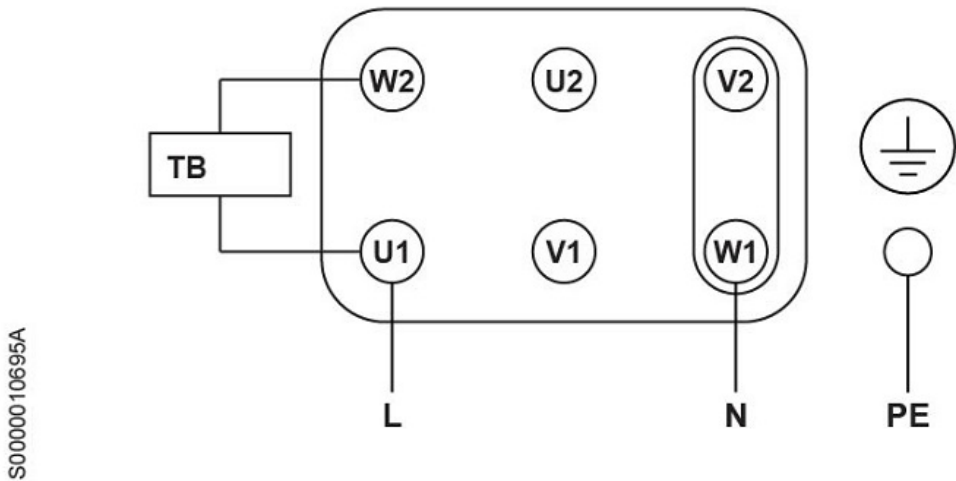

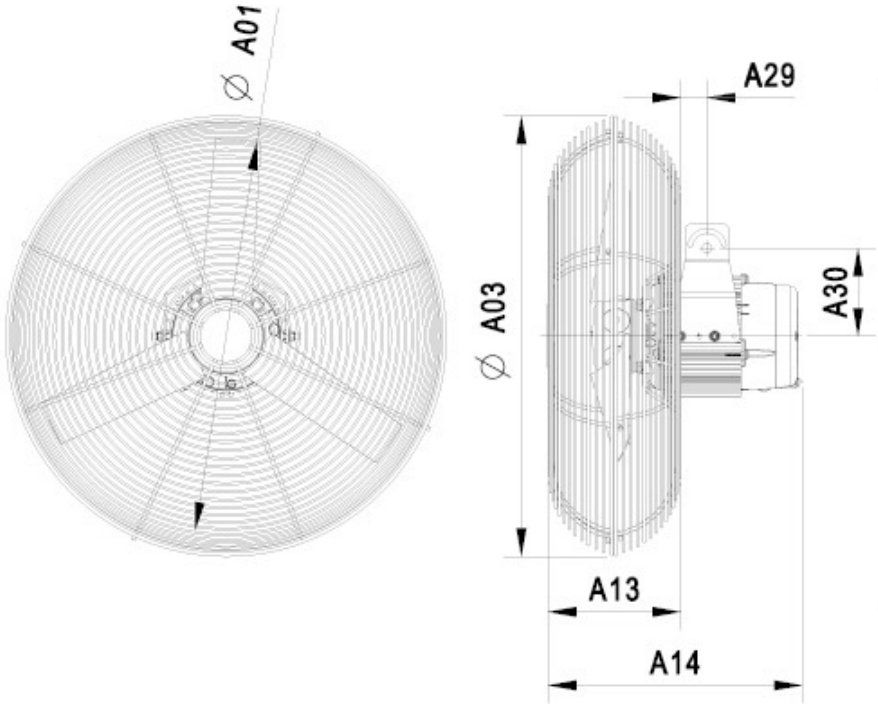Dimensions			
		A01:	35.6 inch
		A03:	38.7 inch
		A13:	10.0 inch
		A14:	16.7 inch
		A29:	1.1 inch
		A30:	4.5 inch

