



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	570	RPM
Power consumption	P _e	1450	W
Nominal current	I _{nom}	4.9/2.8	A
Maximum current	I _{max}	5.2/3.0	A
Cos φ		0.75	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		102.4	kg
Packing dimensions		365.3x1000x1000	mm

Fan details



Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0 Pa	49000 m ³ /h
50 Pa	38500 m ³ /h

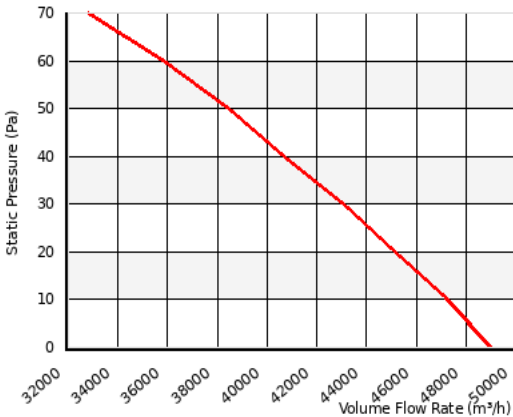

Please note: Picture may deviate from original product

Approval(s)




Article number: V4D1600M10238


Galvanised cone fans - High volume

Wiring diagram

BF01 - 3 Phase - Star connected with luster terminal - CCW

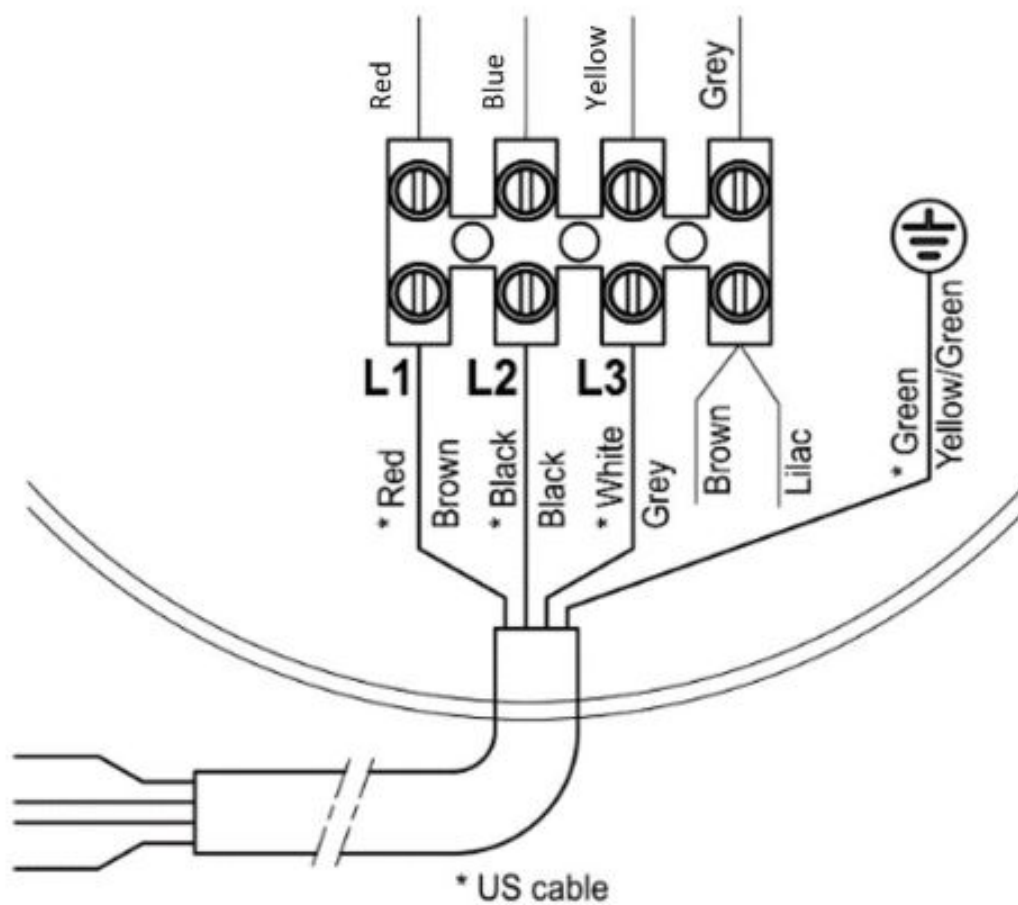

Dimensions

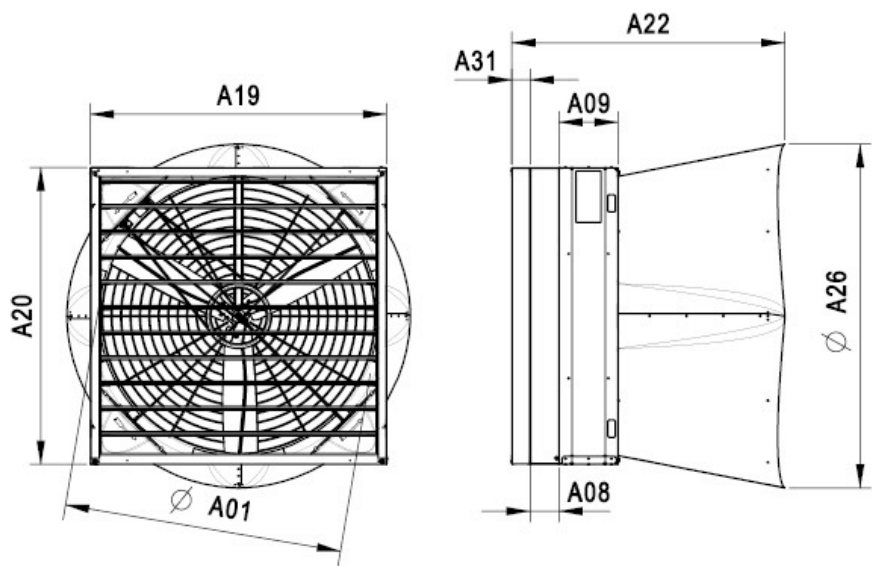

A01:	1284 mm
A08:	135 mm
A09:	275 mm
A19:	1382 mm
A20:	1382 mm
A22:	1275 mm
A26:	1600 mm
A31:	85 mm

